

FALSTER 280/580

GB

IP65




Power
8 / 20 w

Efficiency
85 Lm/w

Lifetime
50.000 Hours
(70% Lumen maintenance)

Input
24 VDC

Material
Aluminum

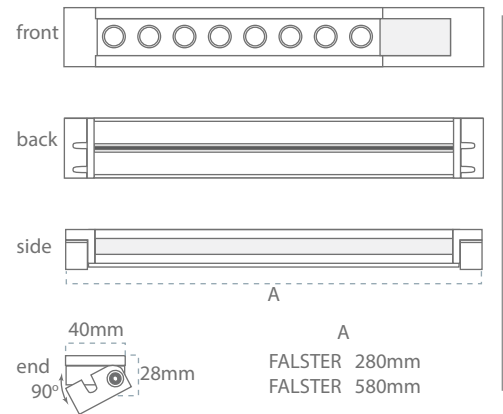

Product code	Lumen output	Beam	Power	CCT	CRI
FALSTER 280MM 8W 24V	680 lm	60°	8 w	4000	> 80
FALSTER 280MM 8W 24V SPEC	680 lm	60°	8 w	4000	> 80
FALSTER 580MM 20W 24V	1720 lm	60°	20 w	4000	> 80
FALSTER 580MM 20W 24V SPEC	1720 lm	60°	20 w	4000	> 80

Feature

- Powerful projector for industrial machine light.
- IP65 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit for long life.
- Hard anodized aluminum ensures a corrosion free product in damp enviroment.
- Working temperature: - 20 - +45 °C
- In Falster SPEC are all electronics embedded in silicone

Material

- Hard anodized aluminum
- Tempered glass

Benefit

- High reliability
- Maintenance free

Application

- Machine light