

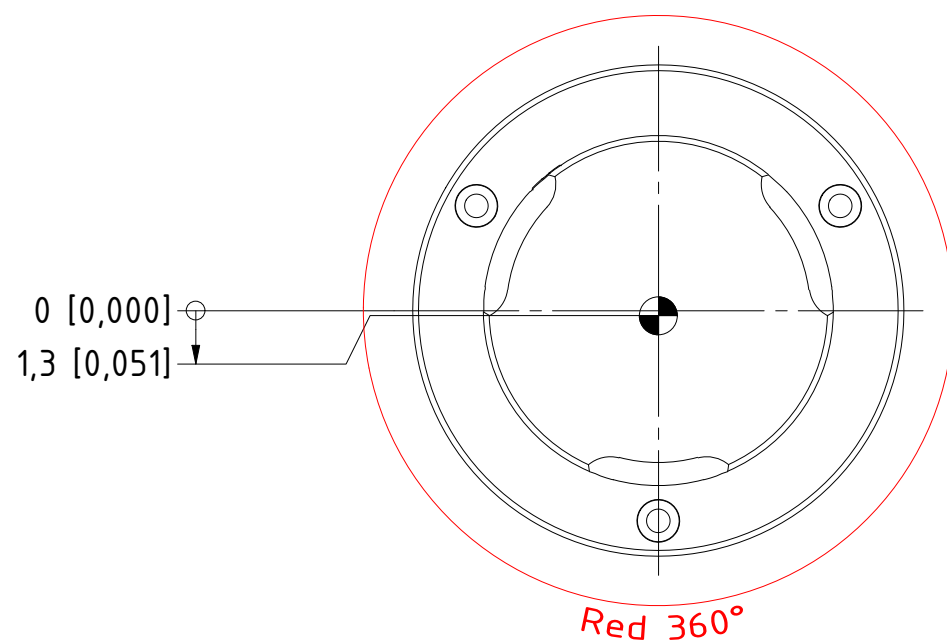
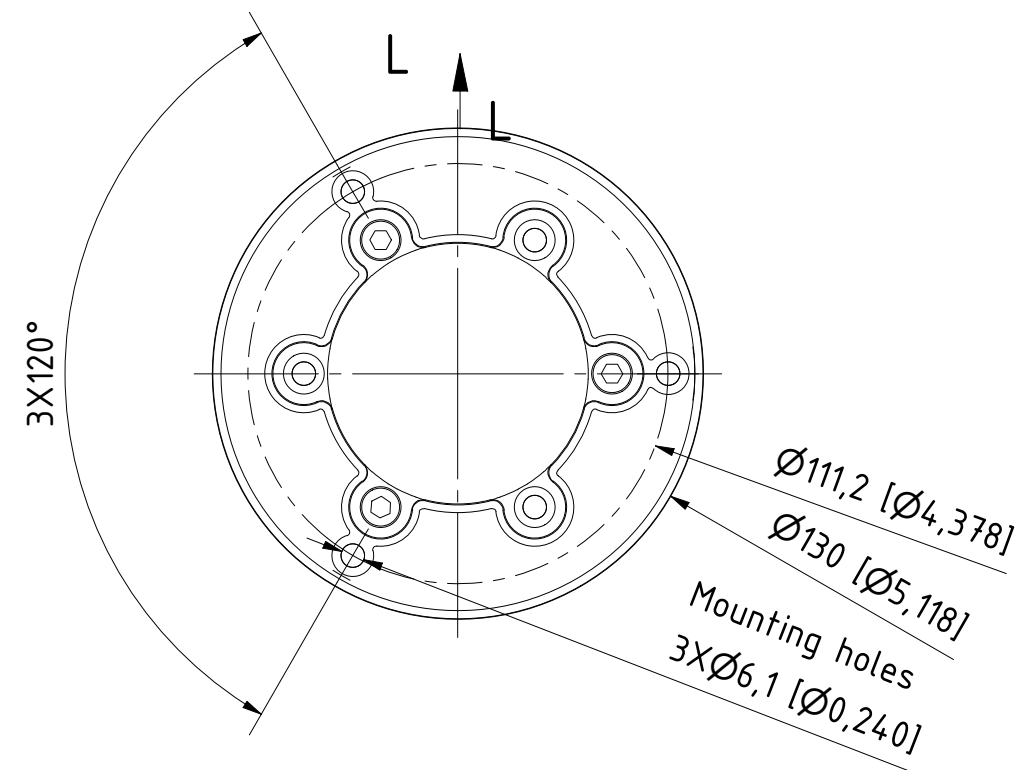
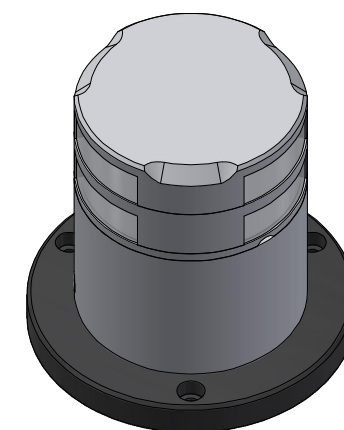
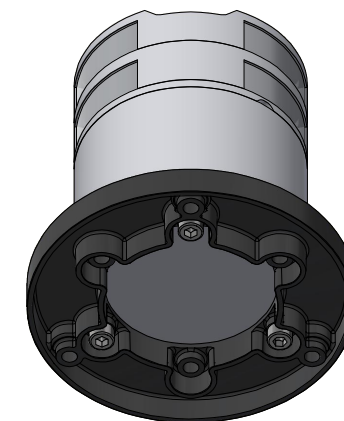
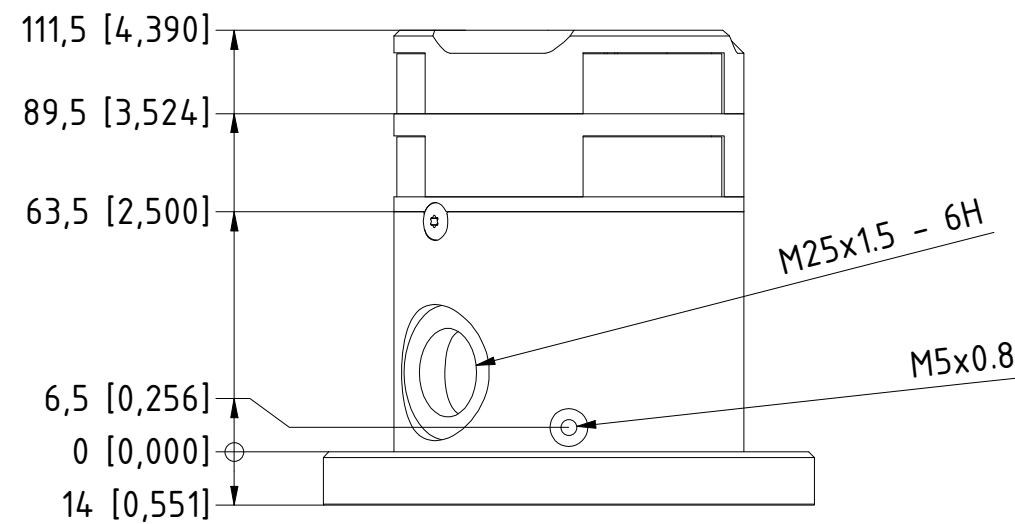


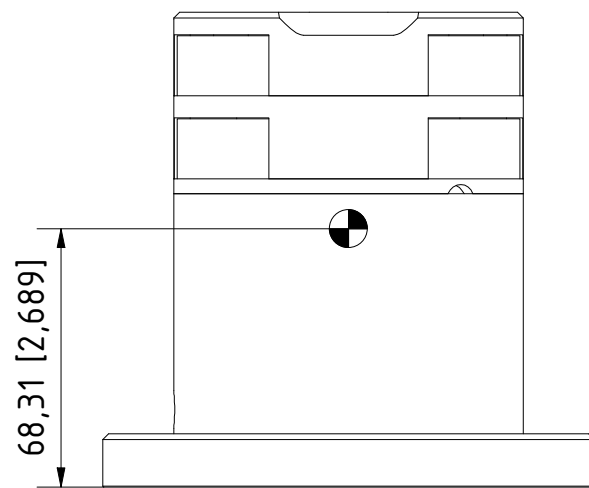

Dimensions : Millimetres [Inches]
Estimated weight:1,1 kg (2,4 lbs)

TITLE: 201-014ST-PRO-I-EX 2nm 360° Red, Double, black EX Zone 1&2, ice-class On a 400-037-EX Promount base and 400-404 PE base plate , Cable Side					
DRAWING No.: 201-014ST-PRO-I-EX				Sheet No.: 1	DRAWN BY: LSA
SCALE: 1 / 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 21-03-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					





This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.

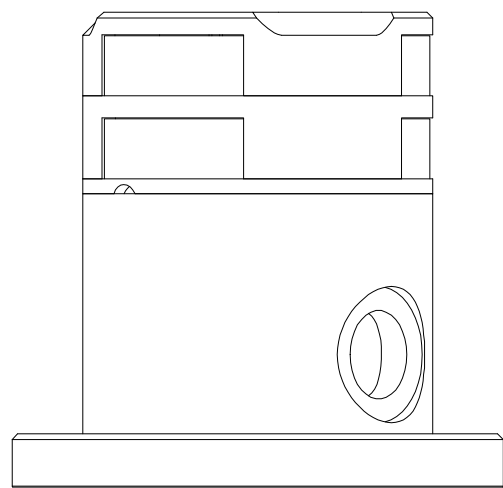

Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com



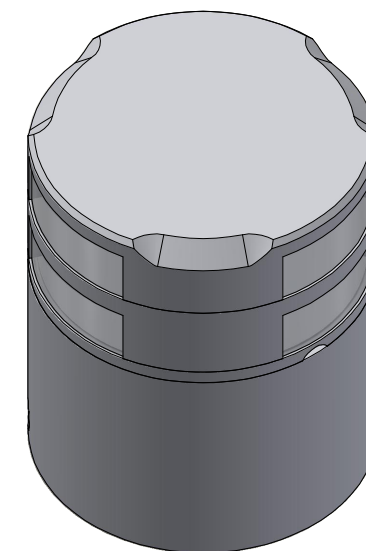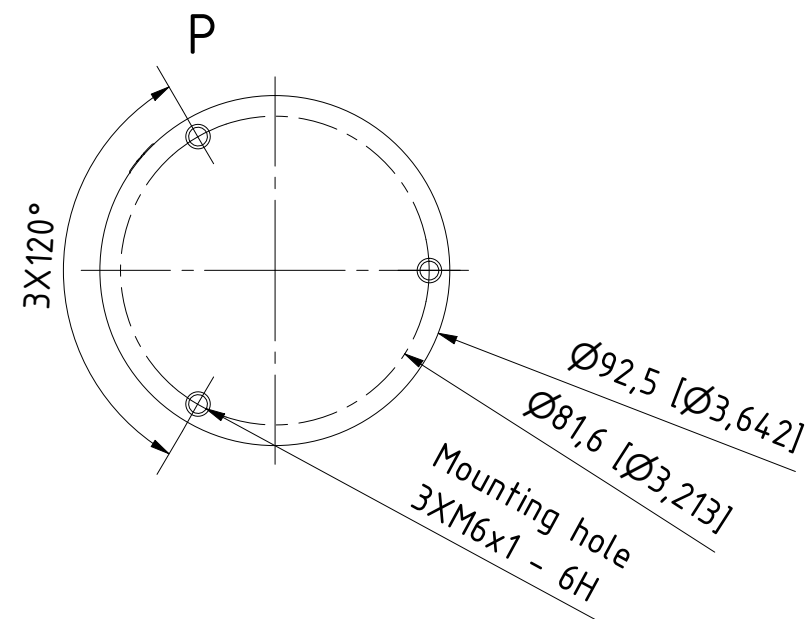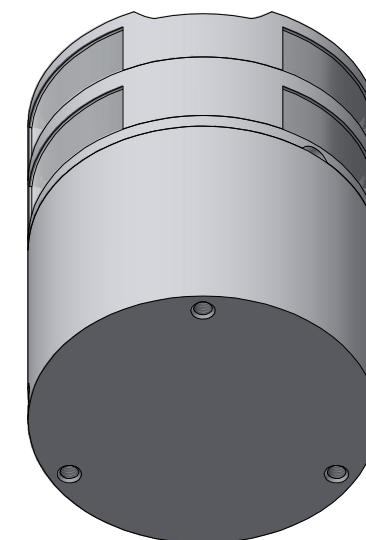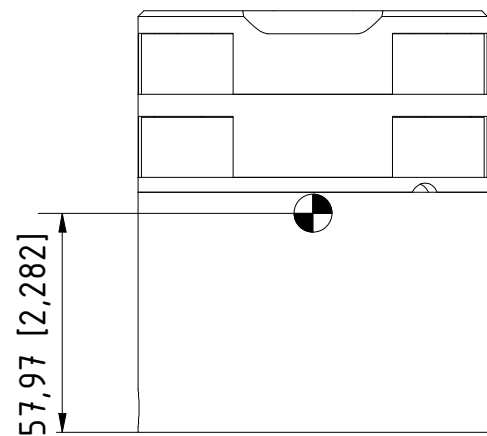

This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.

Tel:(+45) 32 48 50 30
info@lopolight.com

