


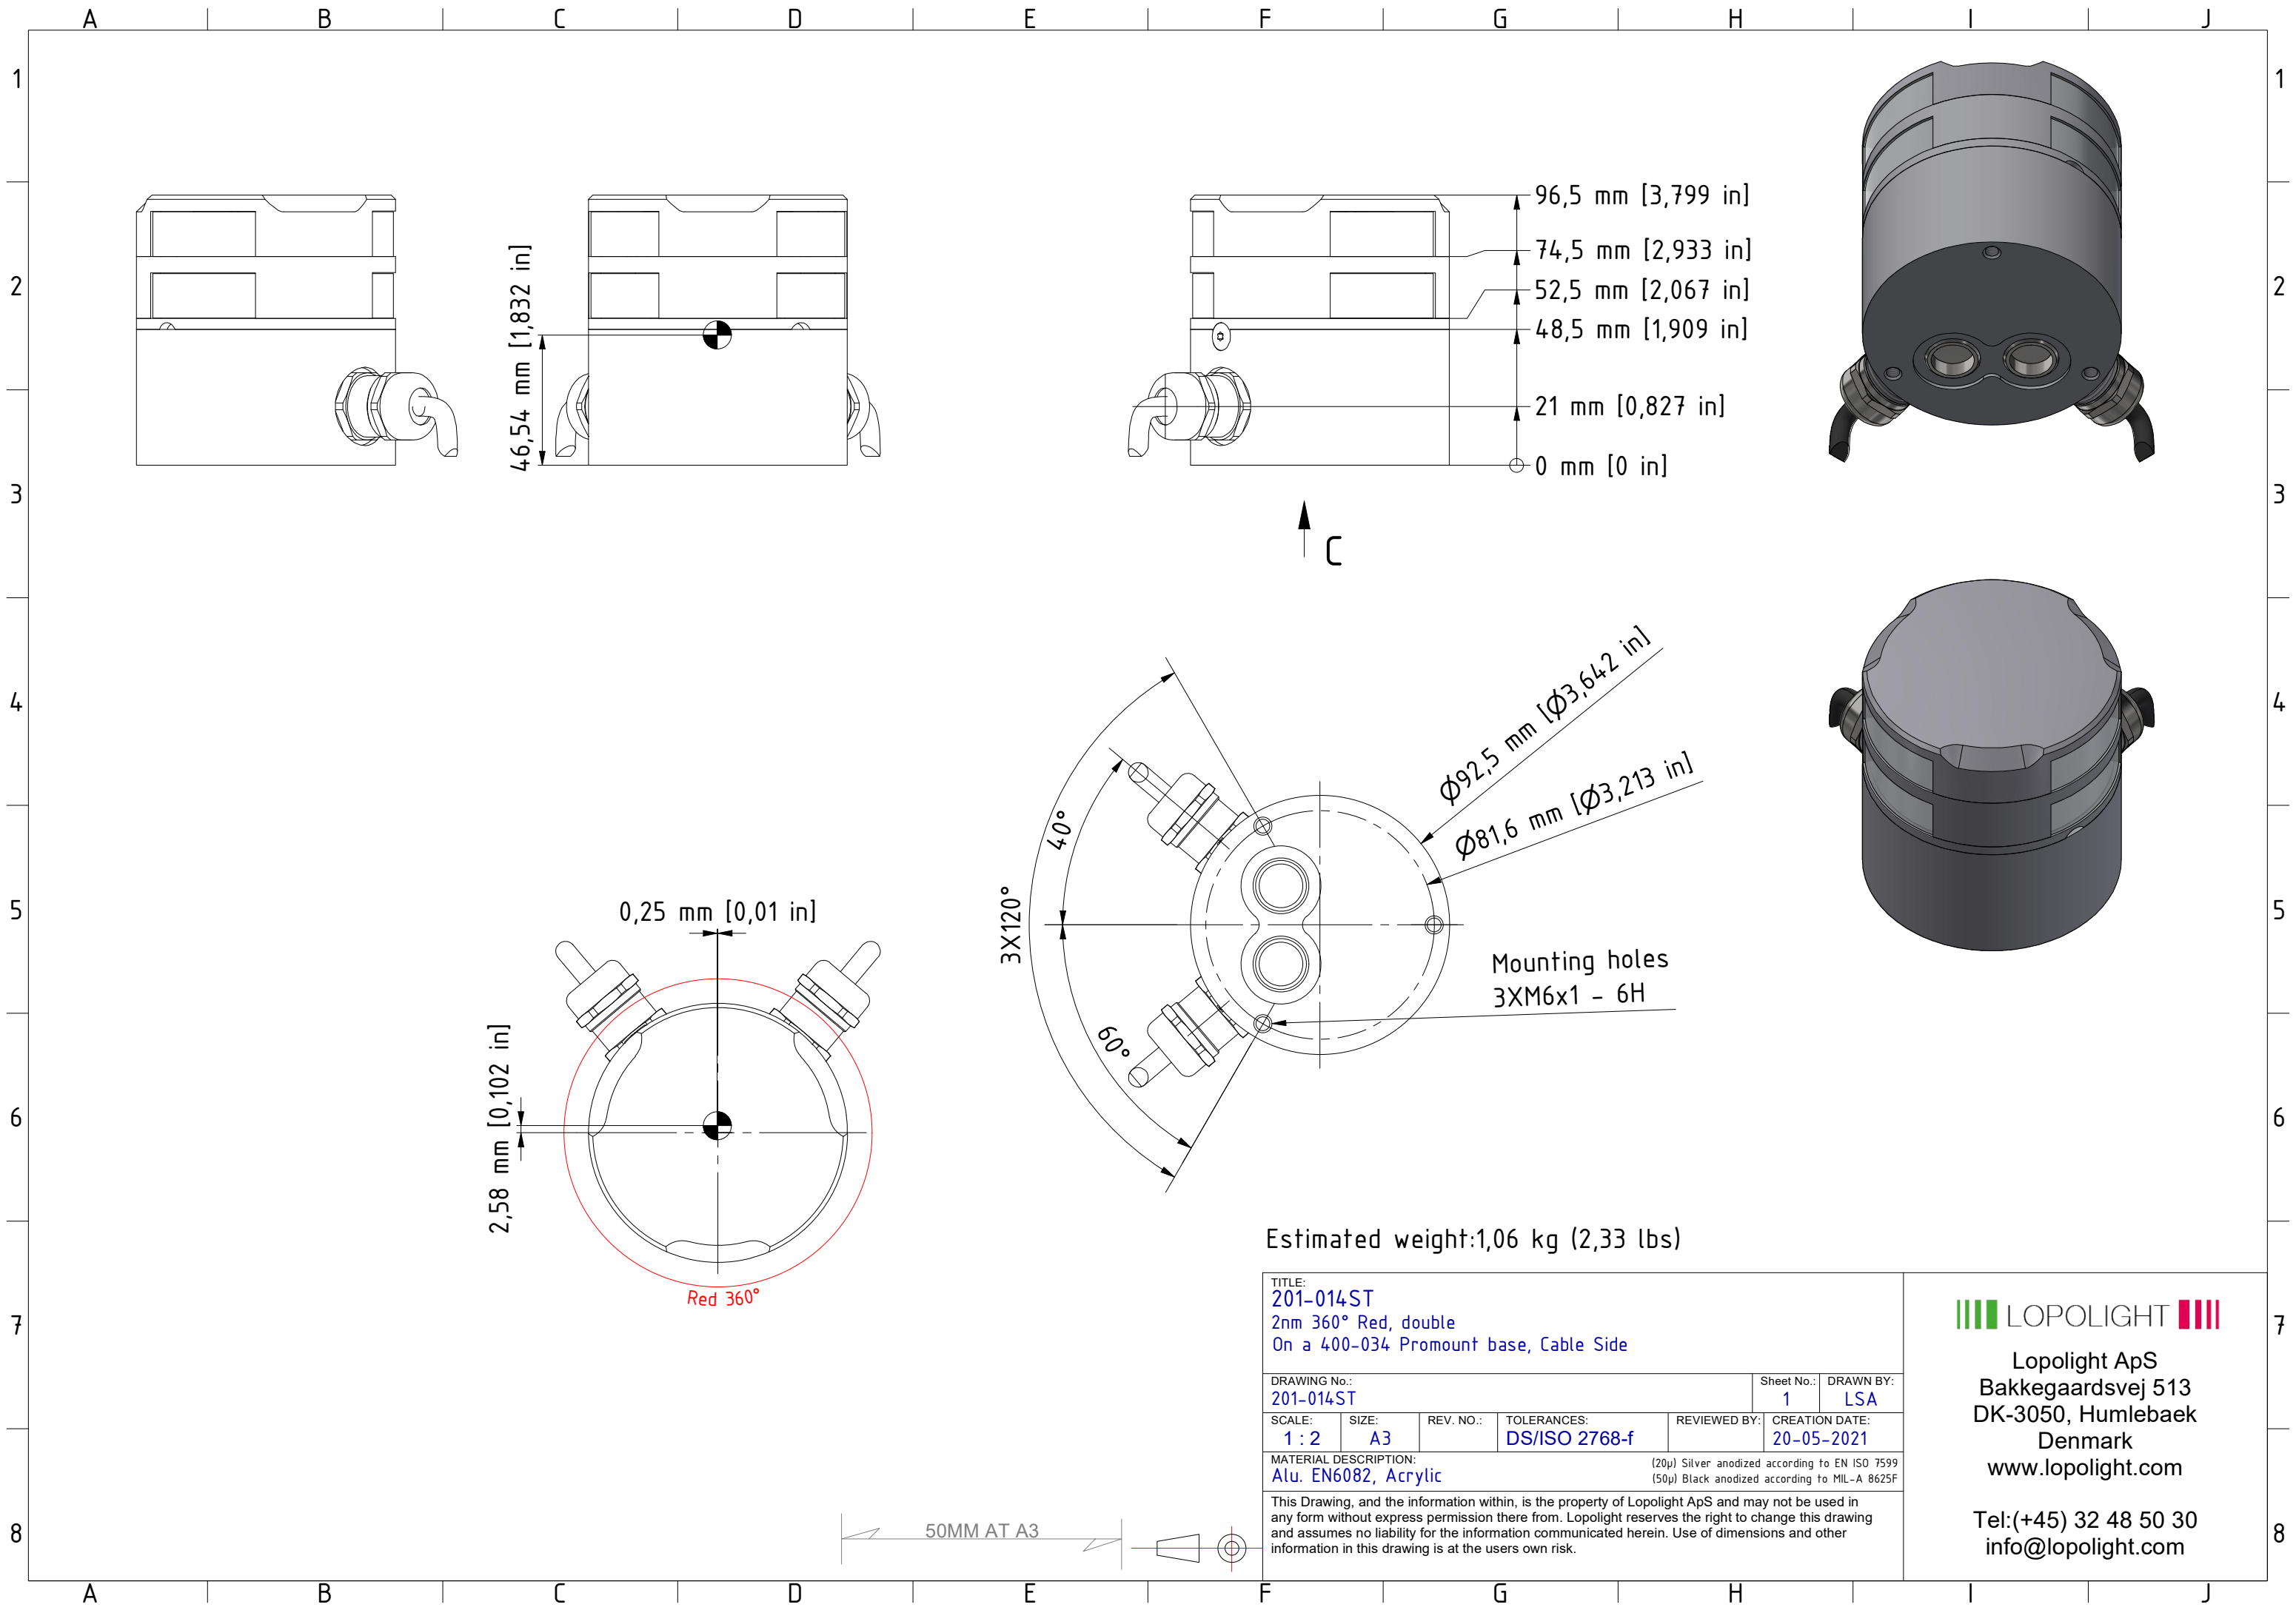

TITLE:  
201-014ST  
2nm 360° Red, double  
On a 400-034 Promount base, Cable Side

|                                               |             |           |                              |                 |                              |
|-----------------------------------------------|-------------|-----------|------------------------------|-----------------|------------------------------|
| DRAWING No.:<br>201-014ST                     |             |           |                              | Sheet No.:<br>1 | DRAWN BY:<br>LSA             |
| SCALE:<br>1 : 2                               | SIZE:<br>A3 | REV. NO.: | TOLERANCES:<br>DS/ISO 2768-f | REVIEWED BY:    | CREATION DATE:<br>20-05-2021 |
| MATERIAL DESCRIPTION:<br>Alu. EN6082, Acrylic |             |           |                              |                 |                              |


(20µ) Silver anodized according to EN ISO 7599  
(50µ) Black anodized according to MIL-A 8625F

This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS  
Bakkegaardsvej 513  
DK-3050, Humlebaek  
Denmark  
www.lopolight.com

Tel:(+45) 32 48 50 30  
info@lopolight.com

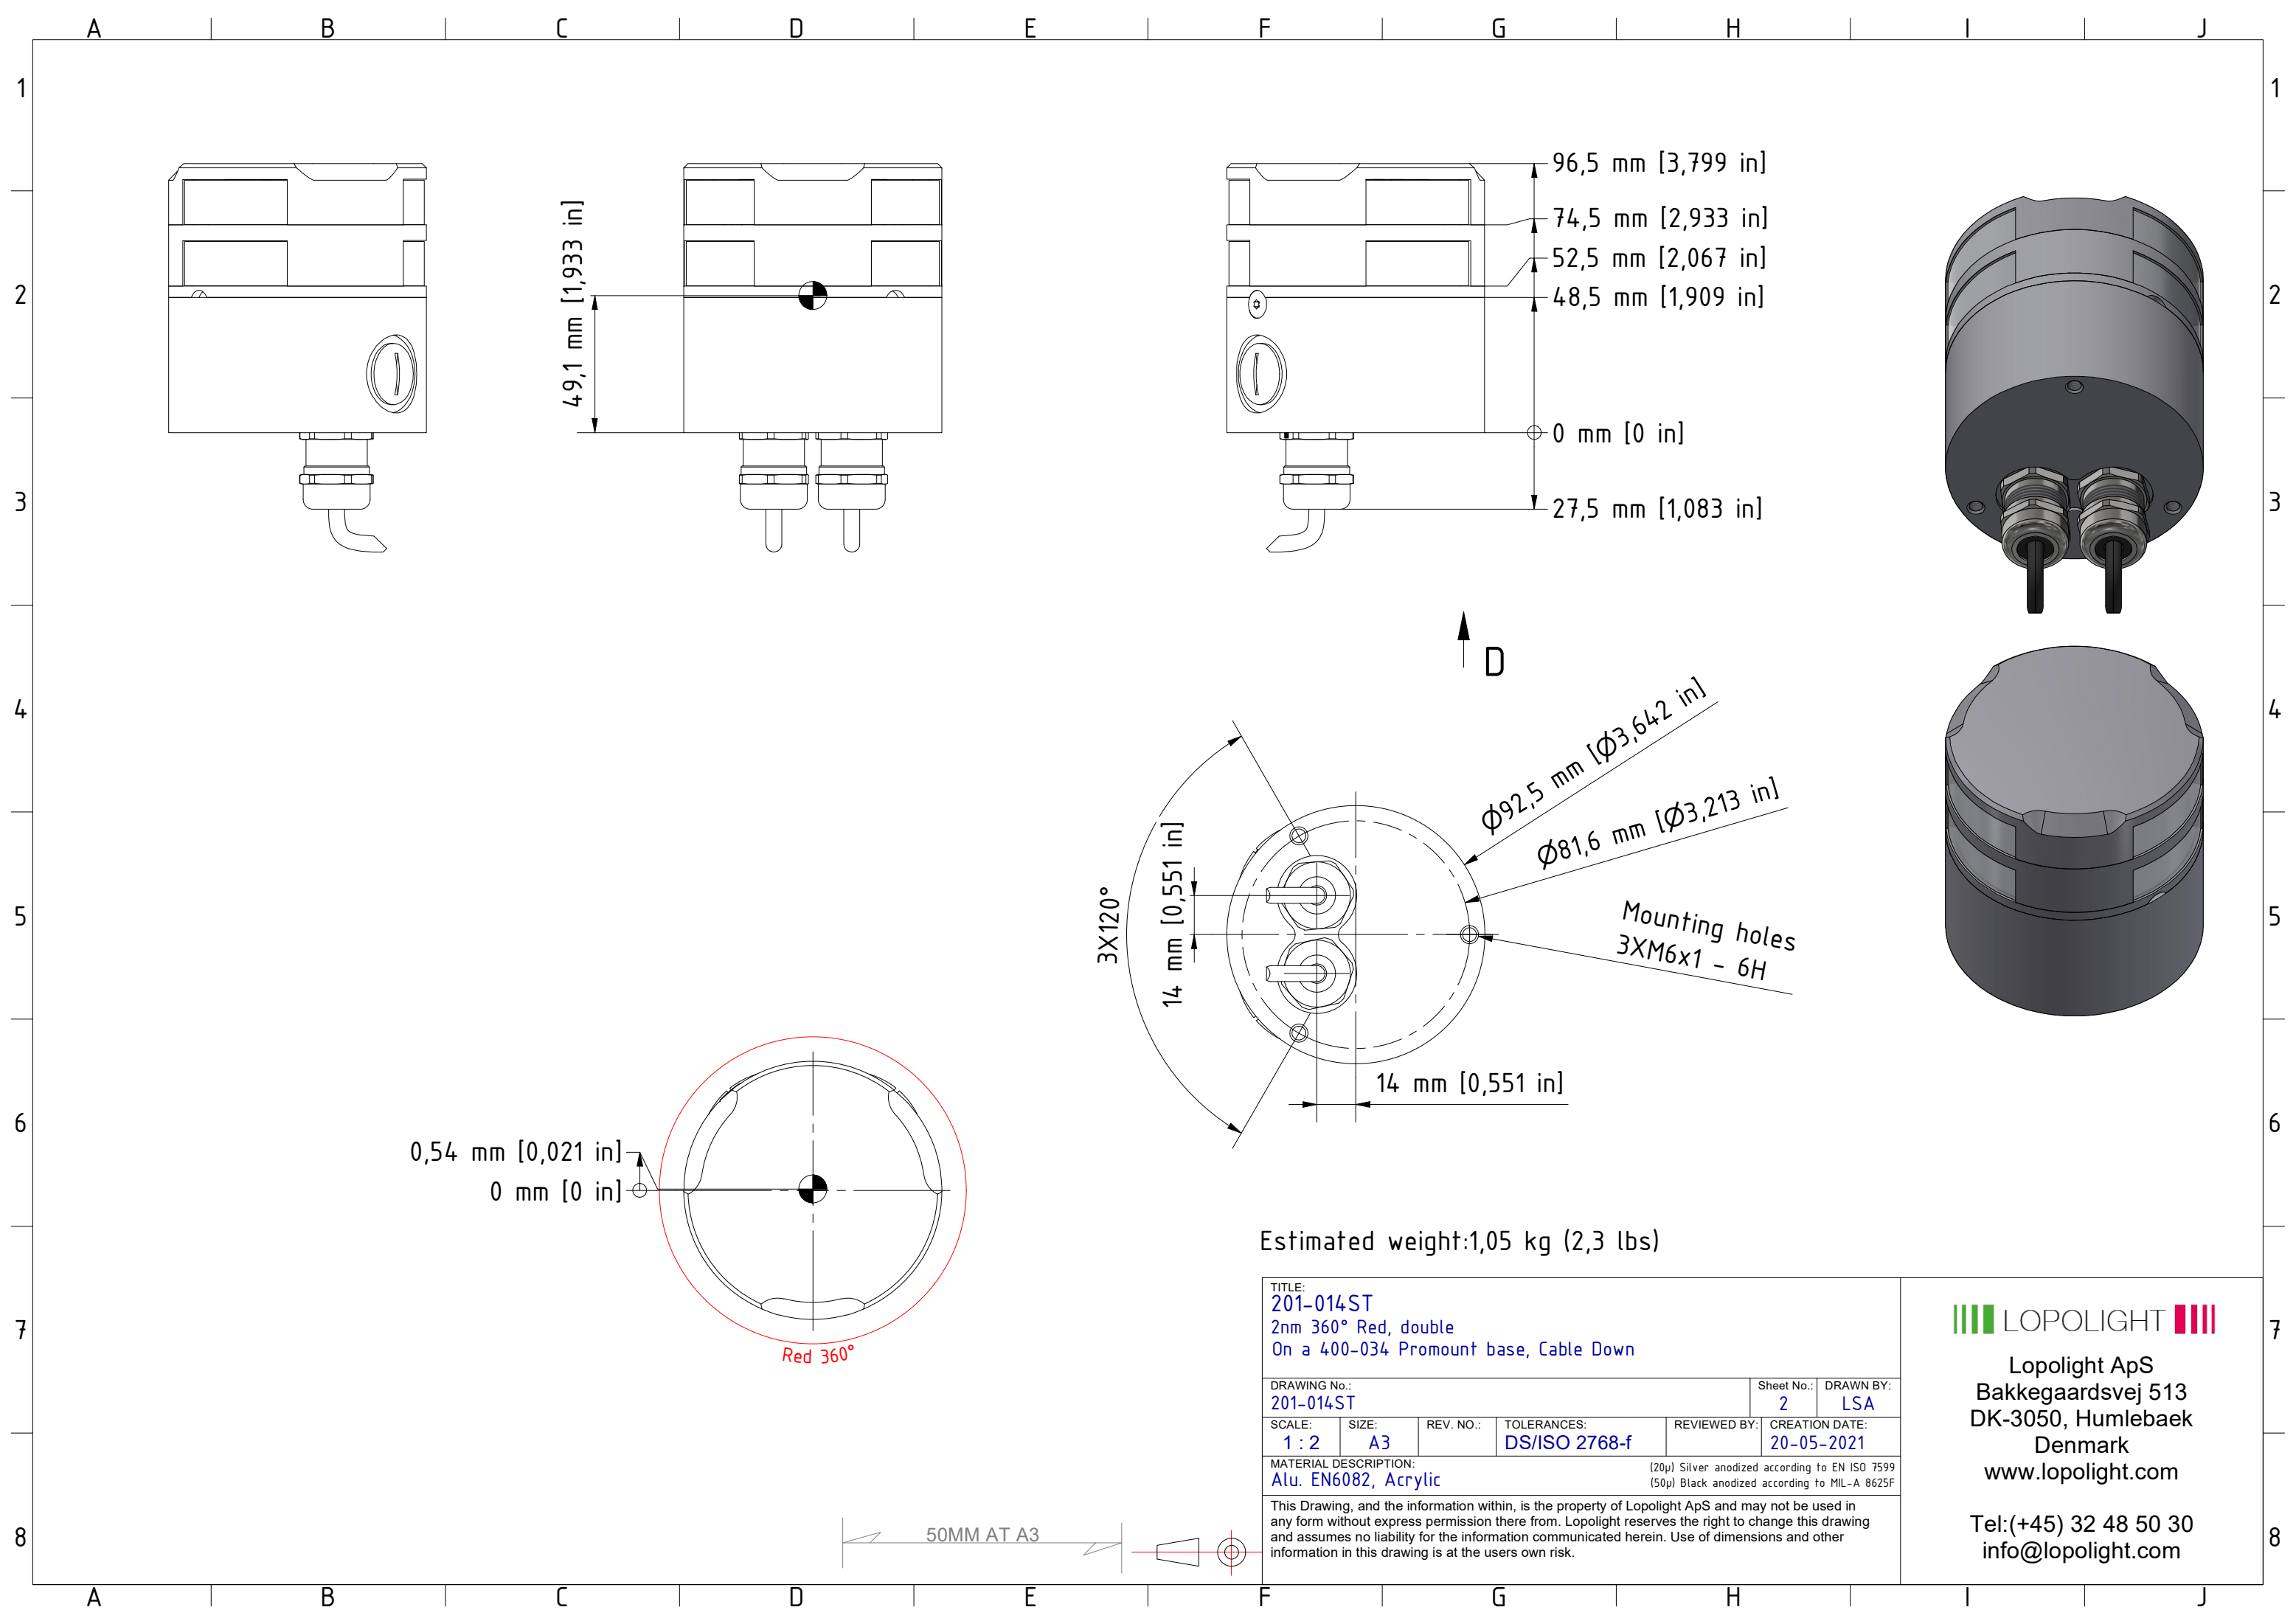

49,1 mm [1,933 in]

96,5 mm [3,799 in]

74,5 mm [2,933 in]


52,5 mm [2,067 in]

48,5 mm [1,909 in]

0 mm [0 in]

27,5 mm [1,083 in]

D

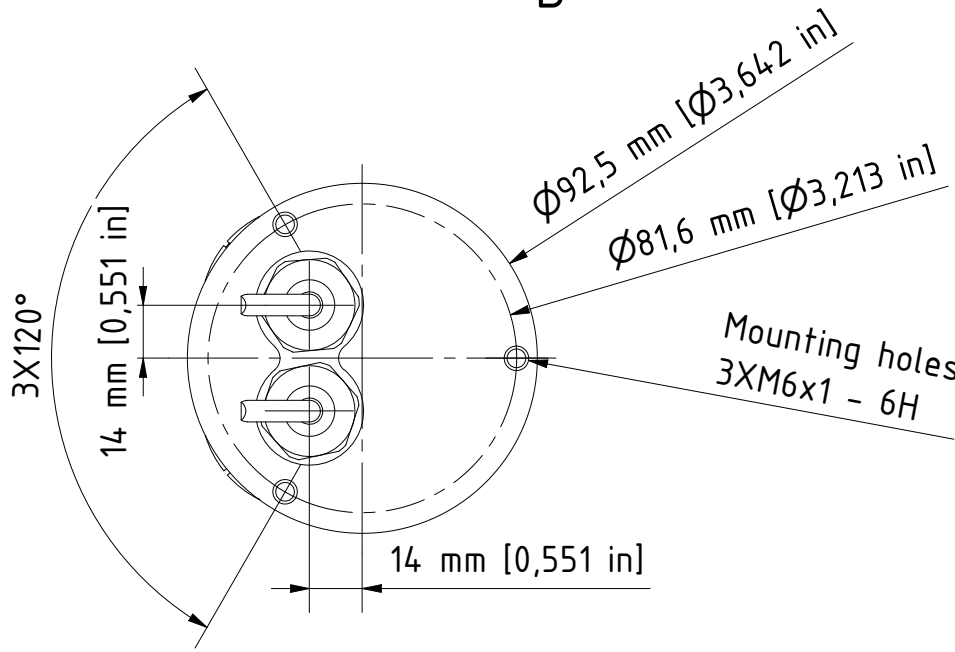

0,54 mm [0,021 in]

0 mm [0 in]

Red 360°

Estimated weight:1,05 kg (2,3 lbs)


|                                                                                                 |             |           |                              |                 |                              |
|-------------------------------------------------------------------------------------------------|-------------|-----------|------------------------------|-----------------|------------------------------|
| TITLE:<br>201-014ST<br>2nm 360° Red, double<br>On a 400-034 Promount base, Cable Down           |             |           |                              |                 |                              |
| DRAWING No.:<br>201-014ST                                                                       |             |           |                              | Sheet No.:<br>2 | DRAWN BY:<br>LSA             |
| SCALE:<br>1 : 2                                                                                 | SIZE:<br>A3 | REV. NO.: | TOLERANCES:<br>DS/ISO 2768-f | REVIEWED BY:    | CREATION DATE:<br>20-05-2021 |
| MATERIAL DESCRIPTION:<br>Alu. EN6082, Acrylic                                                   |             |           |                              |                 |                              |
| (20µ) Silver anodized according to EN ISO 7599<br>(50µ) Black anodized according to MIL-A 8625F |             |           |                              |                 |                              |

This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS  
Bakkegaardsvej 513  
DK-3050, Humlebaek  
Denmark  
www.lopolight.com

Tel:(+45) 32 48 50 30  
info@lopolight.com

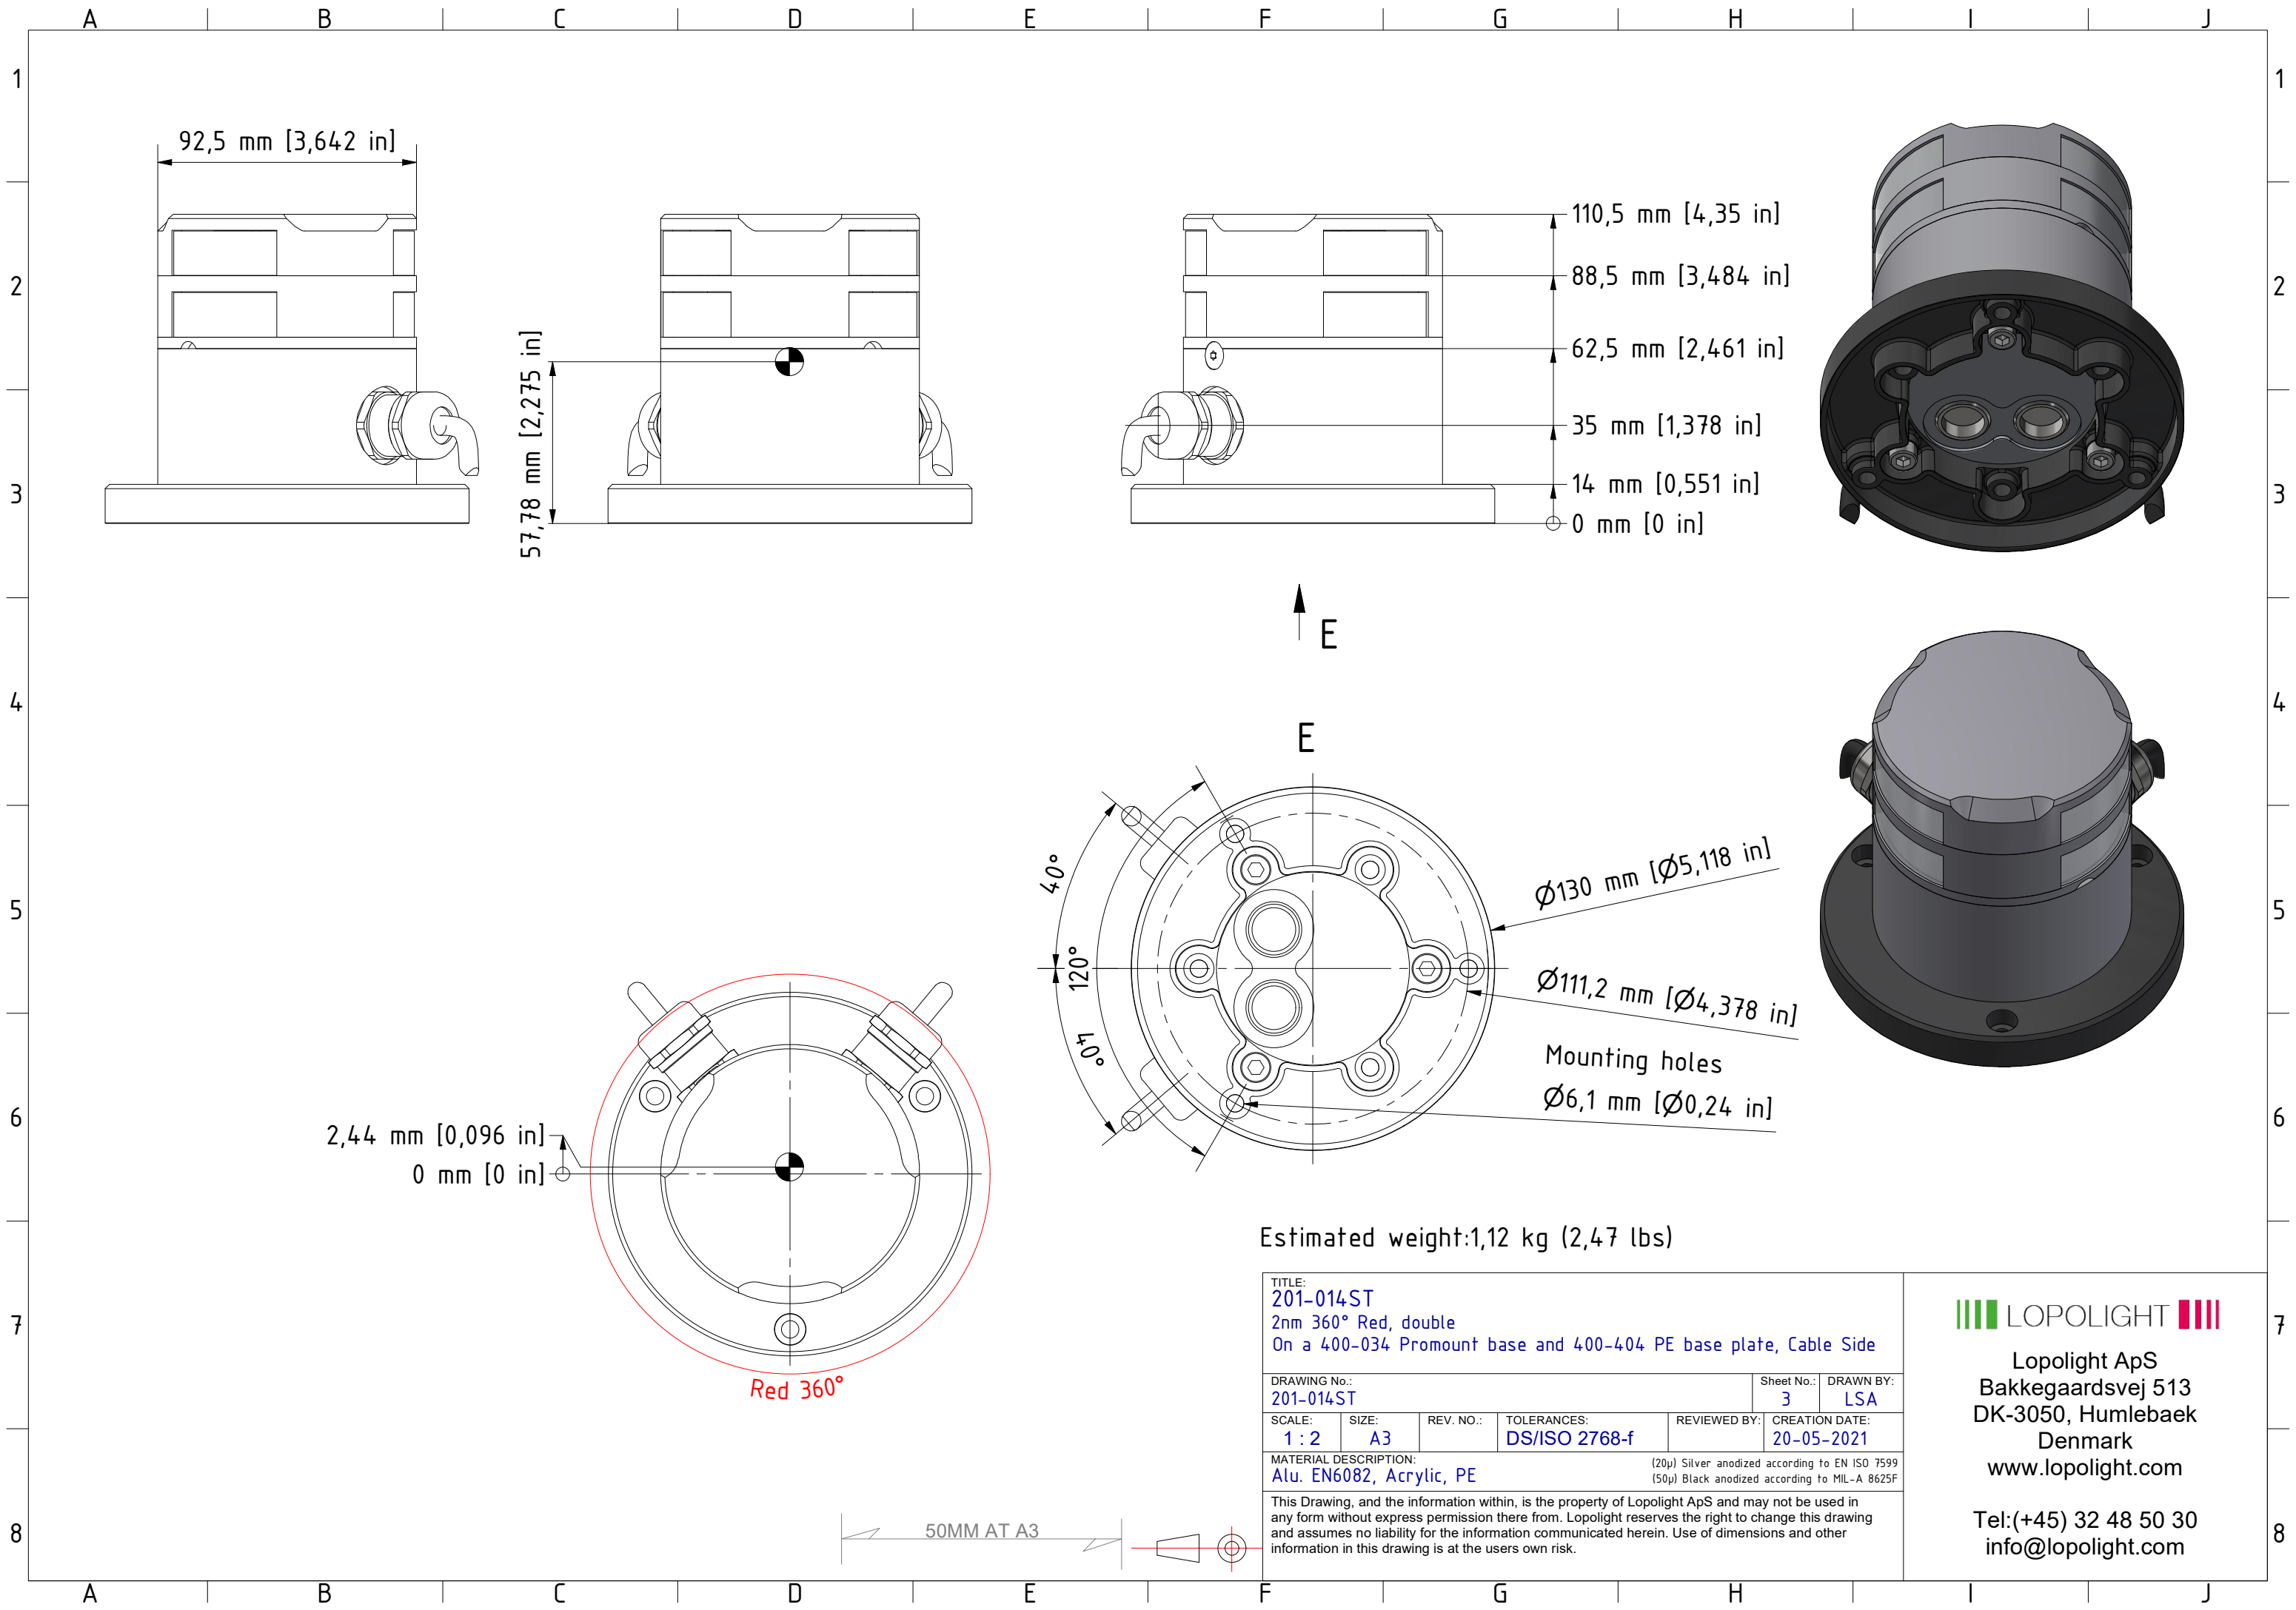


|                                                                                                                                                                                                                                                                                                                                                           |             |           |                              |                 |                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|------------------------------|-----------------|------------------------------|
| TITLE:<br>201-014ST<br>2nm 360° Red, double<br>On a 400-034 Promount base and 400-404 PE base plate, Cable Side                                                                                                                                                                                                                                           |             |           |                              |                 |                              |
| DRAWING No.:<br>201-014ST                                                                                                                                                                                                                                                                                                                                 |             |           |                              | Sheet No.:<br>3 | DRAWN BY:<br>LSA             |
| SCALE:<br>1 : 2                                                                                                                                                                                                                                                                                                                                           | SIZE:<br>A3 | REV. NO.: | TOLERANCES:<br>DS/ISO 2768-f | REVIEWED BY:    | CREATION DATE:<br>20-05-2021 |
| MATERIAL DESCRIPTION:<br>Alu. EN6082, Acrylic, PE                                                                                                                                                                                                                                                                                                         |             |           |                              |                 |                              |
| (20µ) Silver anodized according to EN ISO 7599<br>(50µ) Black anodized according to MIL-A 8625F                                                                                                                                                                                                                                                           |             |           |                              |                 |                              |
| This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk. |             |           |                              |                 |                              |

**LOPOLIGHT**

Lopolight ApS  
Bakkegaardsvej 513  
DK-3050, Humlebaek  
Denmark  
www.lopolight.com

Tel:(+45) 32 48 50 30  
info@lopolight.com



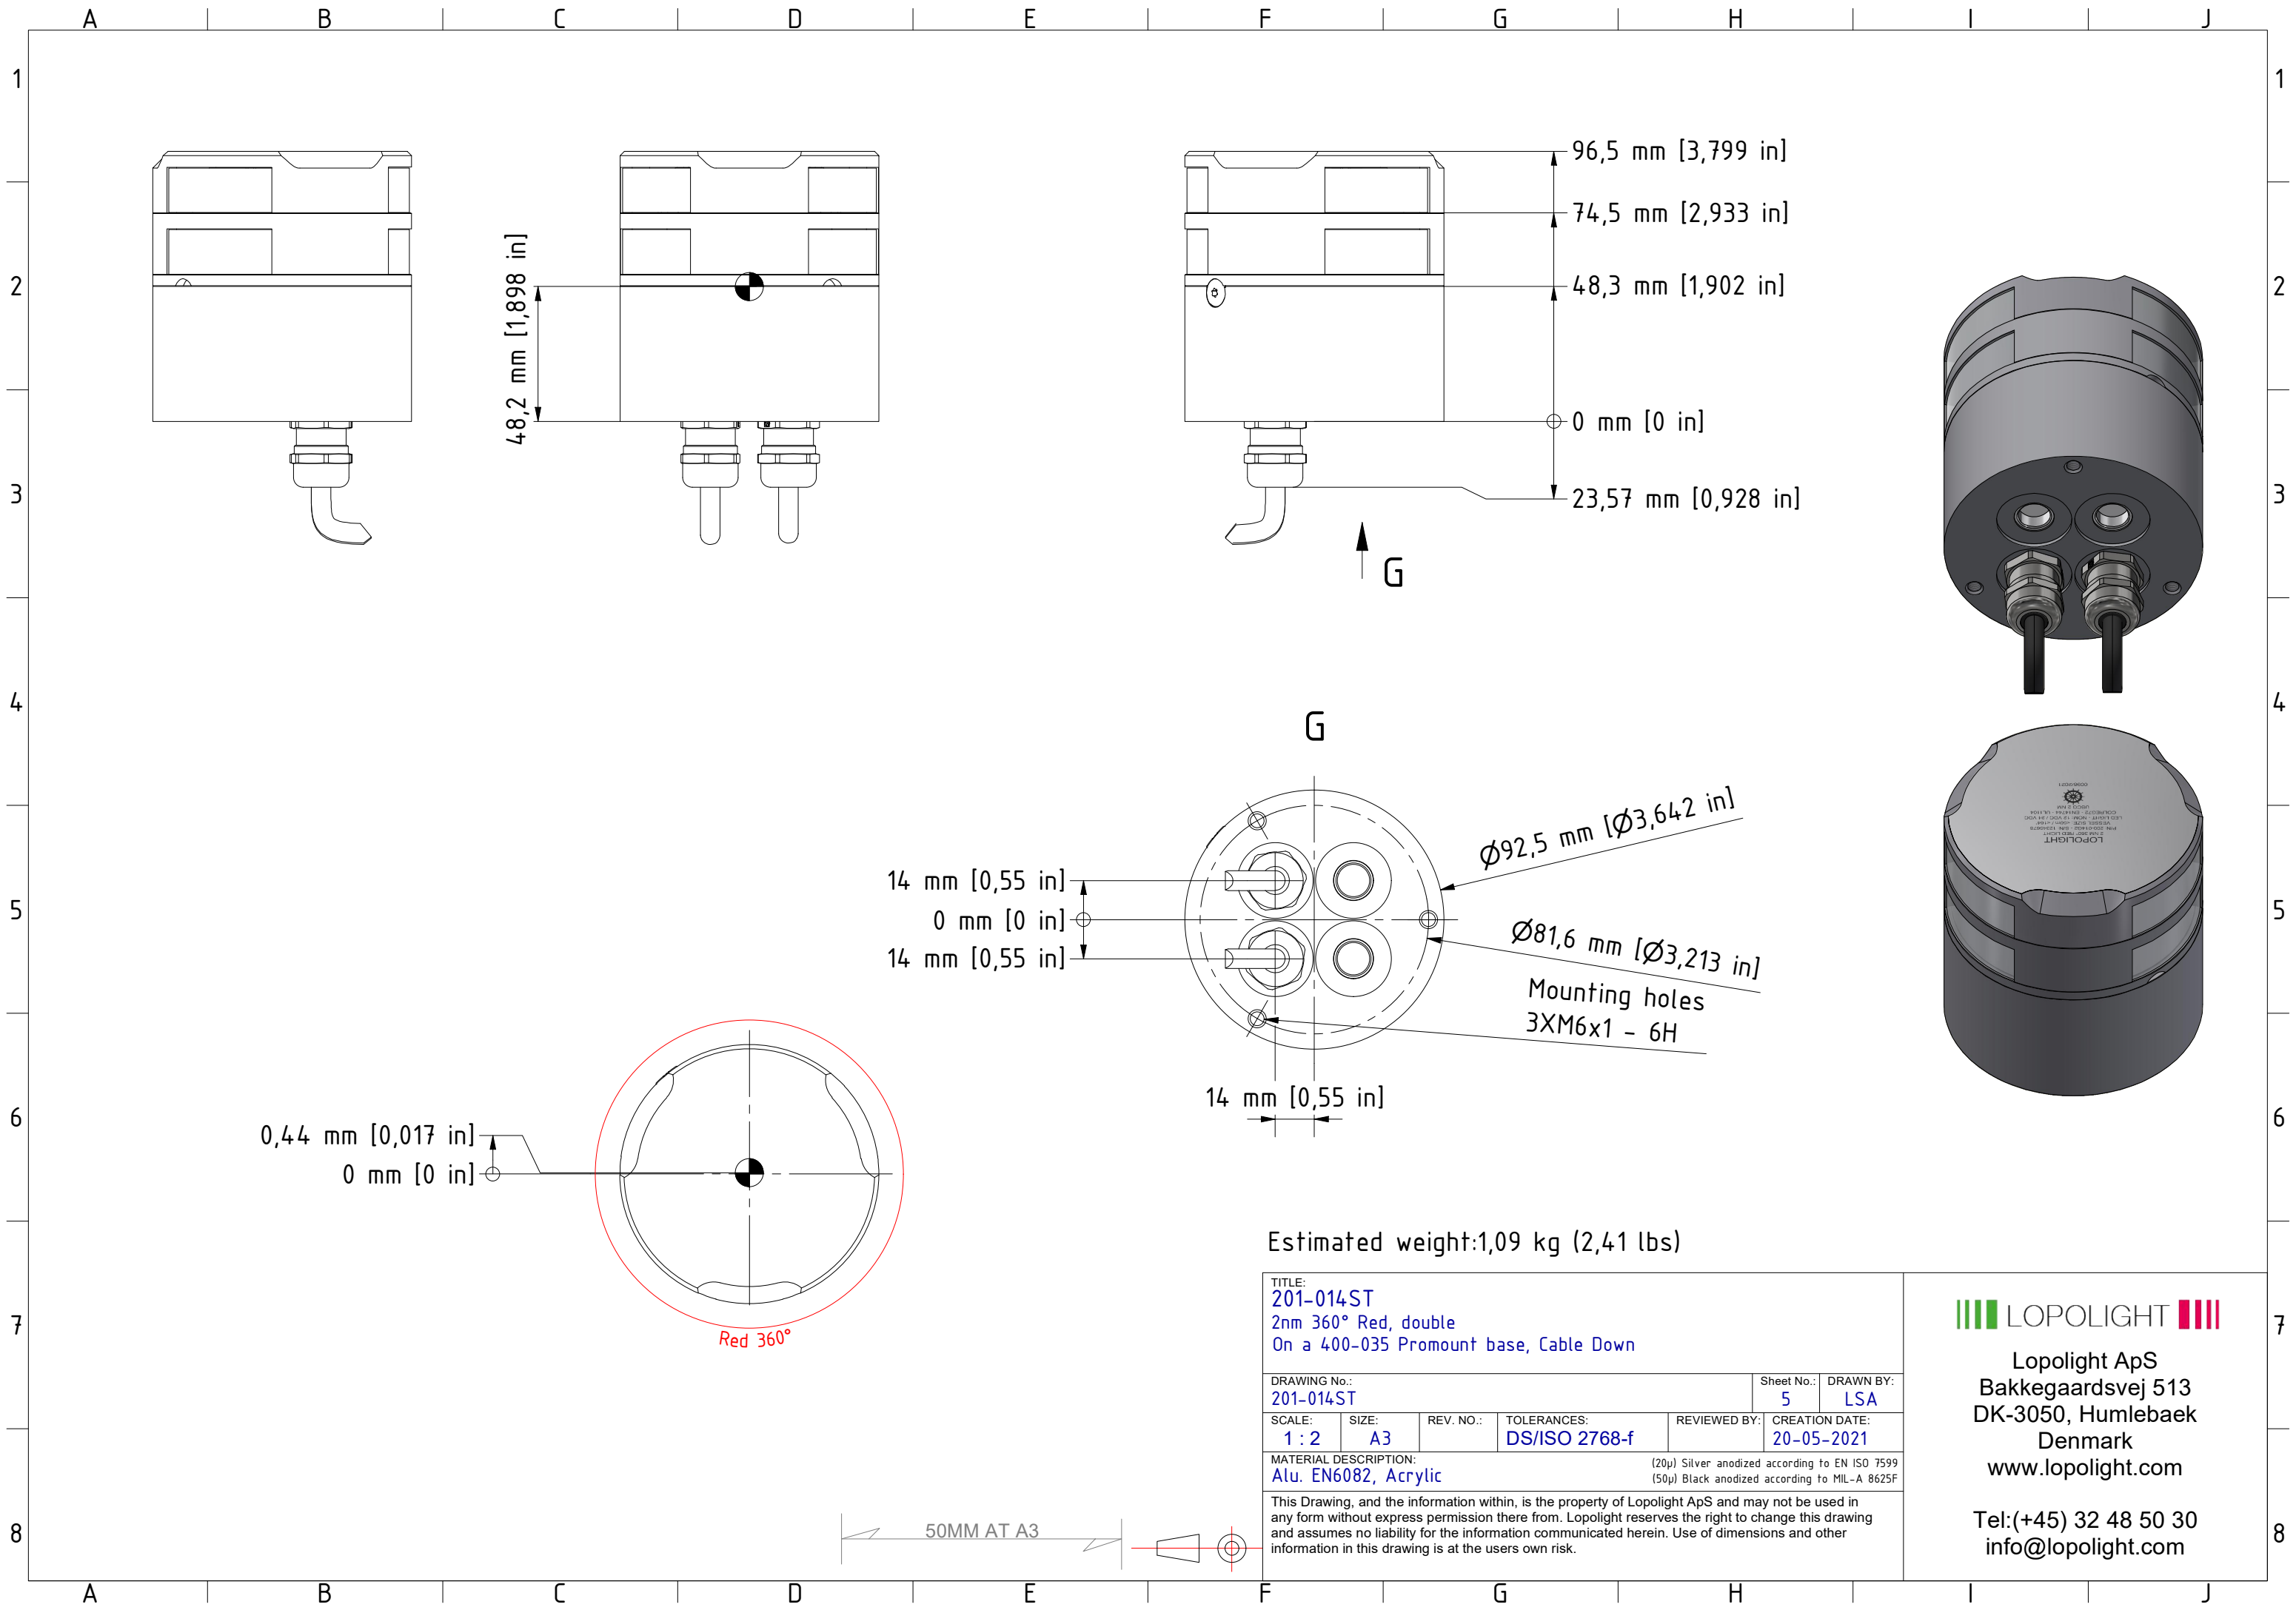


Estimated weight:1,09 kg (2,41 lbs)


|                                                                                                                                                                                                                                                                                                                                                           |             |                            |                                                                                                                |                 |                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------|----------------------------------------------------------------------------------------------------------------|-----------------|------------------------------|
| TITLE:<br>201-014ST<br>2nm 360° Red, double<br>On a 400-035 Promount base, Cable Down                                                                                                                                                                                                                                                                     |             |                            |                                                                                                                |                 |                              |
| DRAWING No.:<br>201-014ST                                                                                                                                                                                                                                                                                                                                 |             |                            |                                                                                                                | Sheet No.:<br>5 | DRAWN BY:<br>LSA             |
| SCALE:<br>1 : 2                                                                                                                                                                                                                                                                                                                                           | SIZE:<br>A3 | REV. NO.:<br>DS/ISO 2768-f | TOLERANCES:<br>(20µ) Silver anodized according to EN ISO 7599<br>(50µ) Black anodized according to MIL-A 8625F | REVIEWED BY:    | CREATION DATE:<br>20-05-2021 |
| MATERIAL DESCRIPTION:<br>Alu. EN6082, Acrylic                                                                                                                                                                                                                                                                                                             |             |                            |                                                                                                                |                 |                              |
| This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk. |             |                            |                                                                                                                |                 |                              |

**LOPOLIGHT**

Lopolight ApS  
Bakkegaardsvej 513  
DK-3050, Humlebaek  
Denmark  
www.lopolight.com

Tel:(+45) 32 48 50 30  
info@lopolight.com

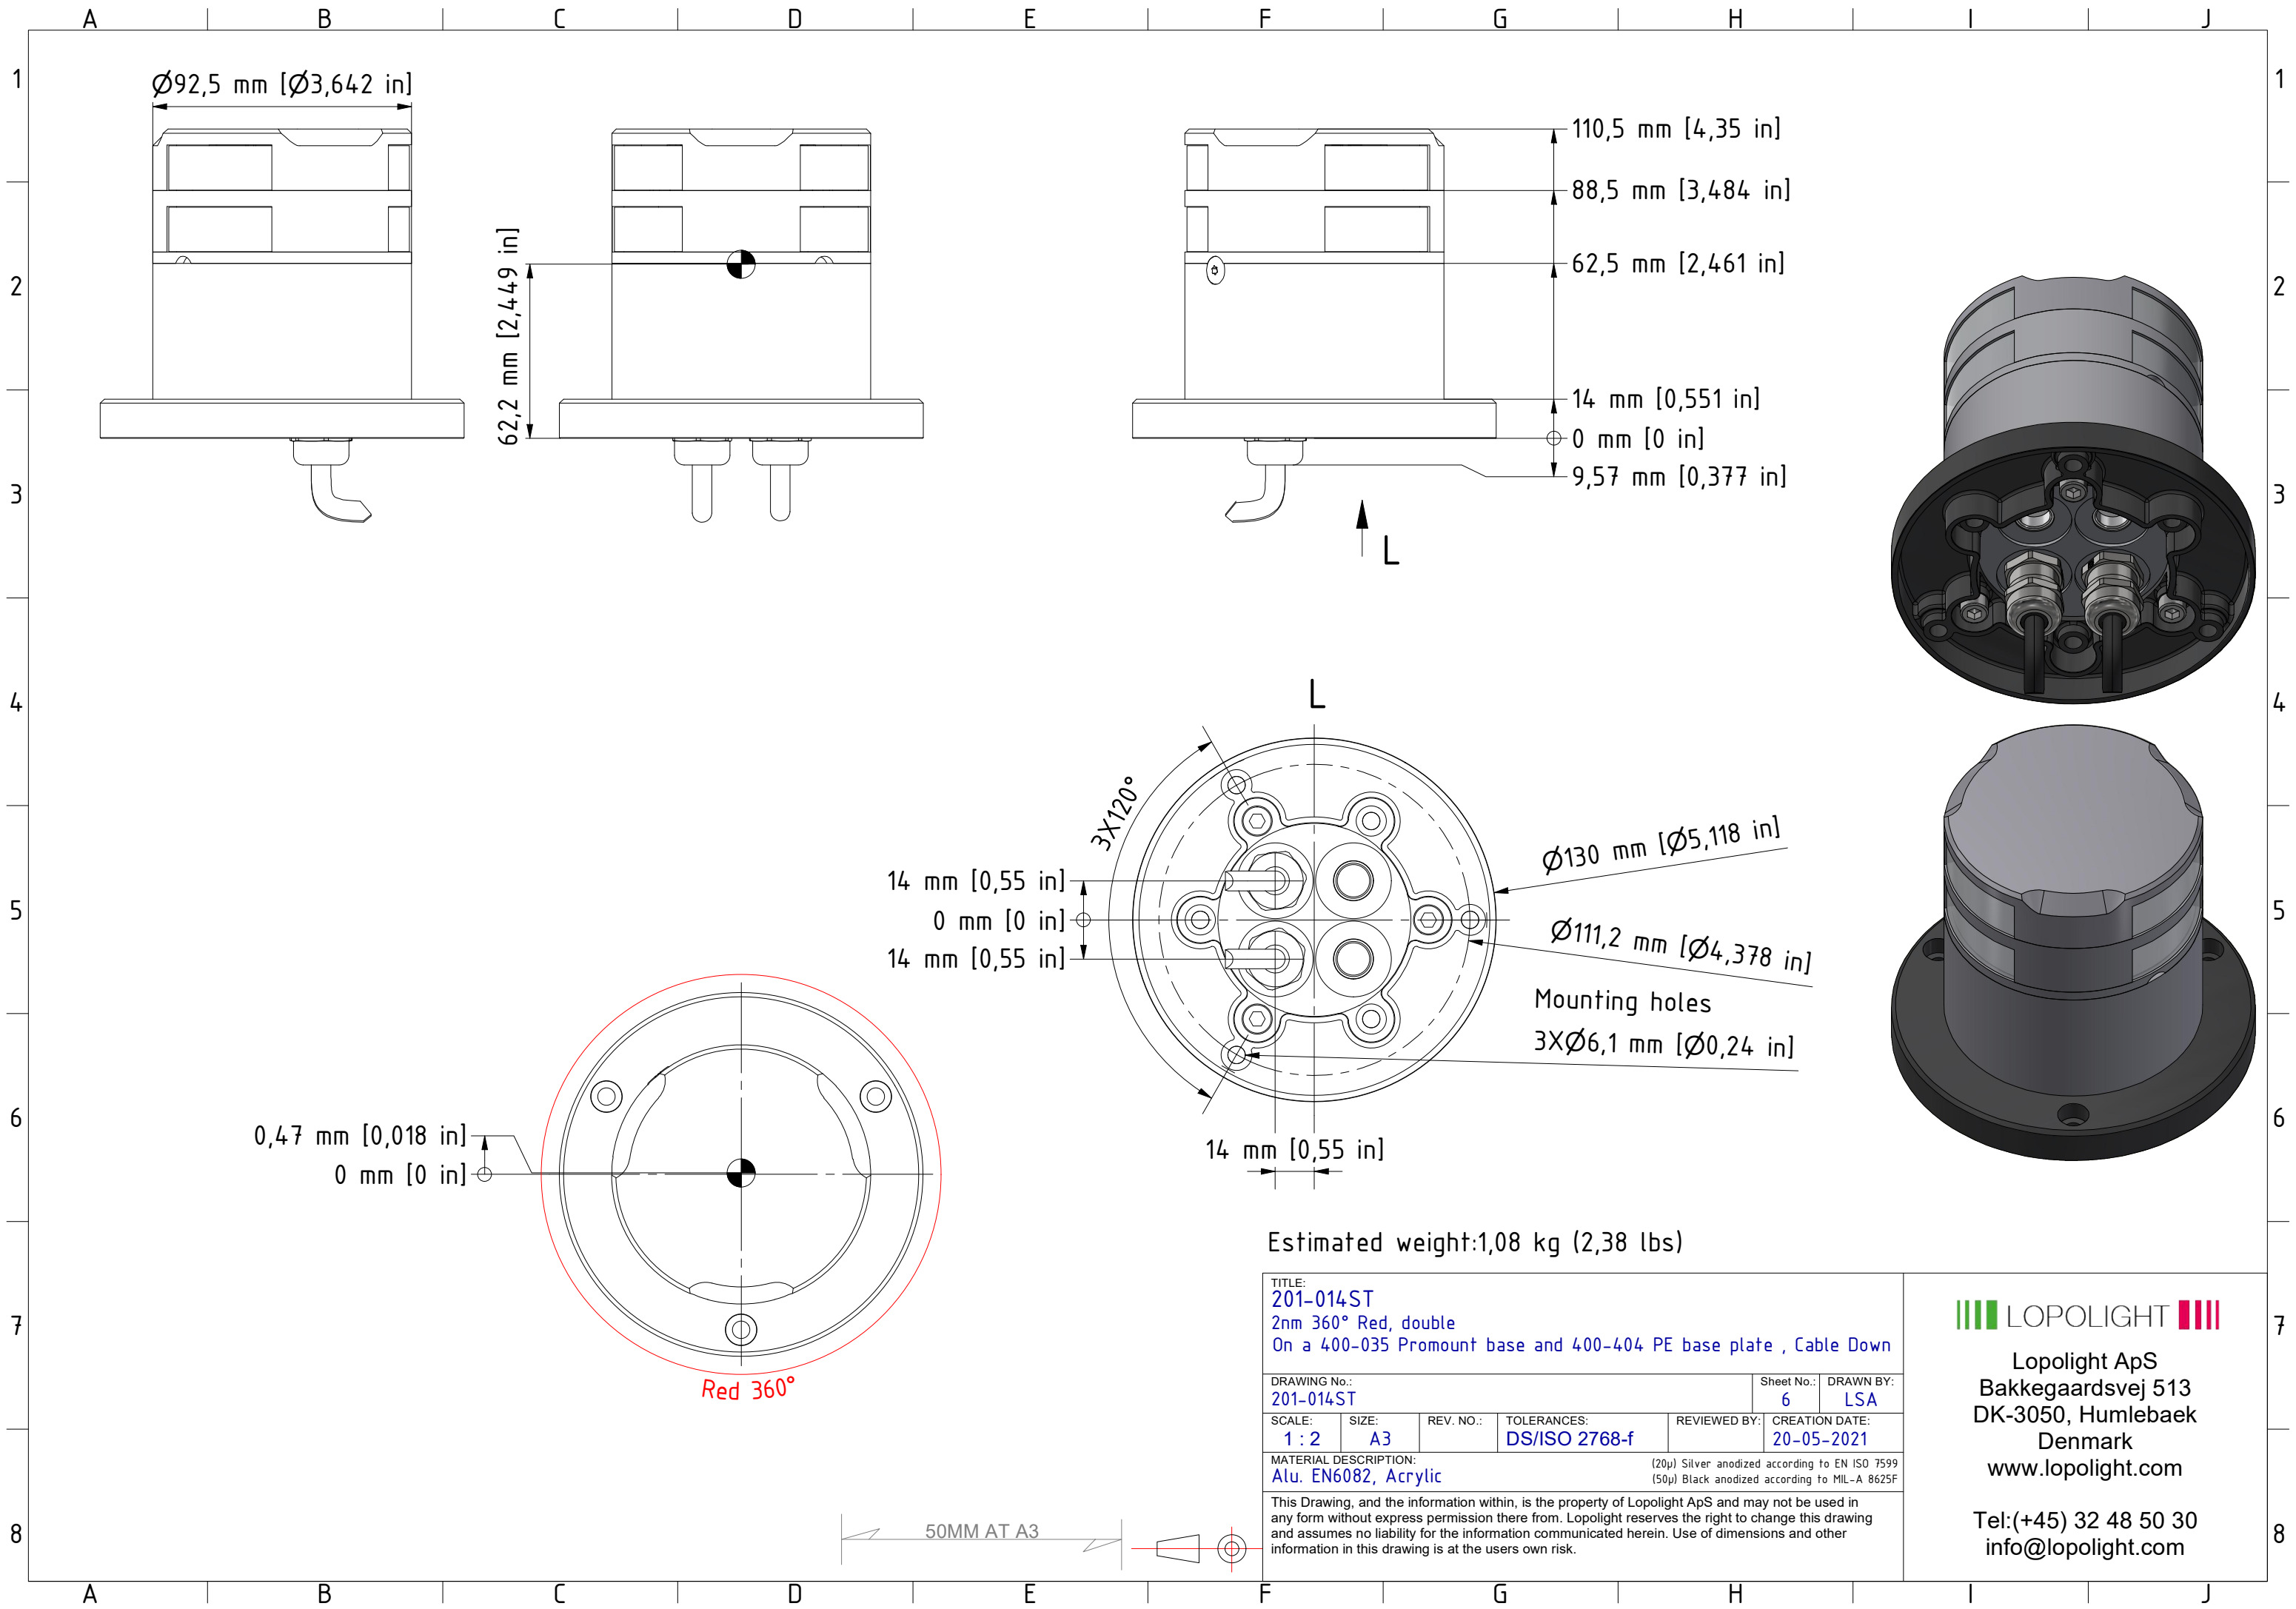

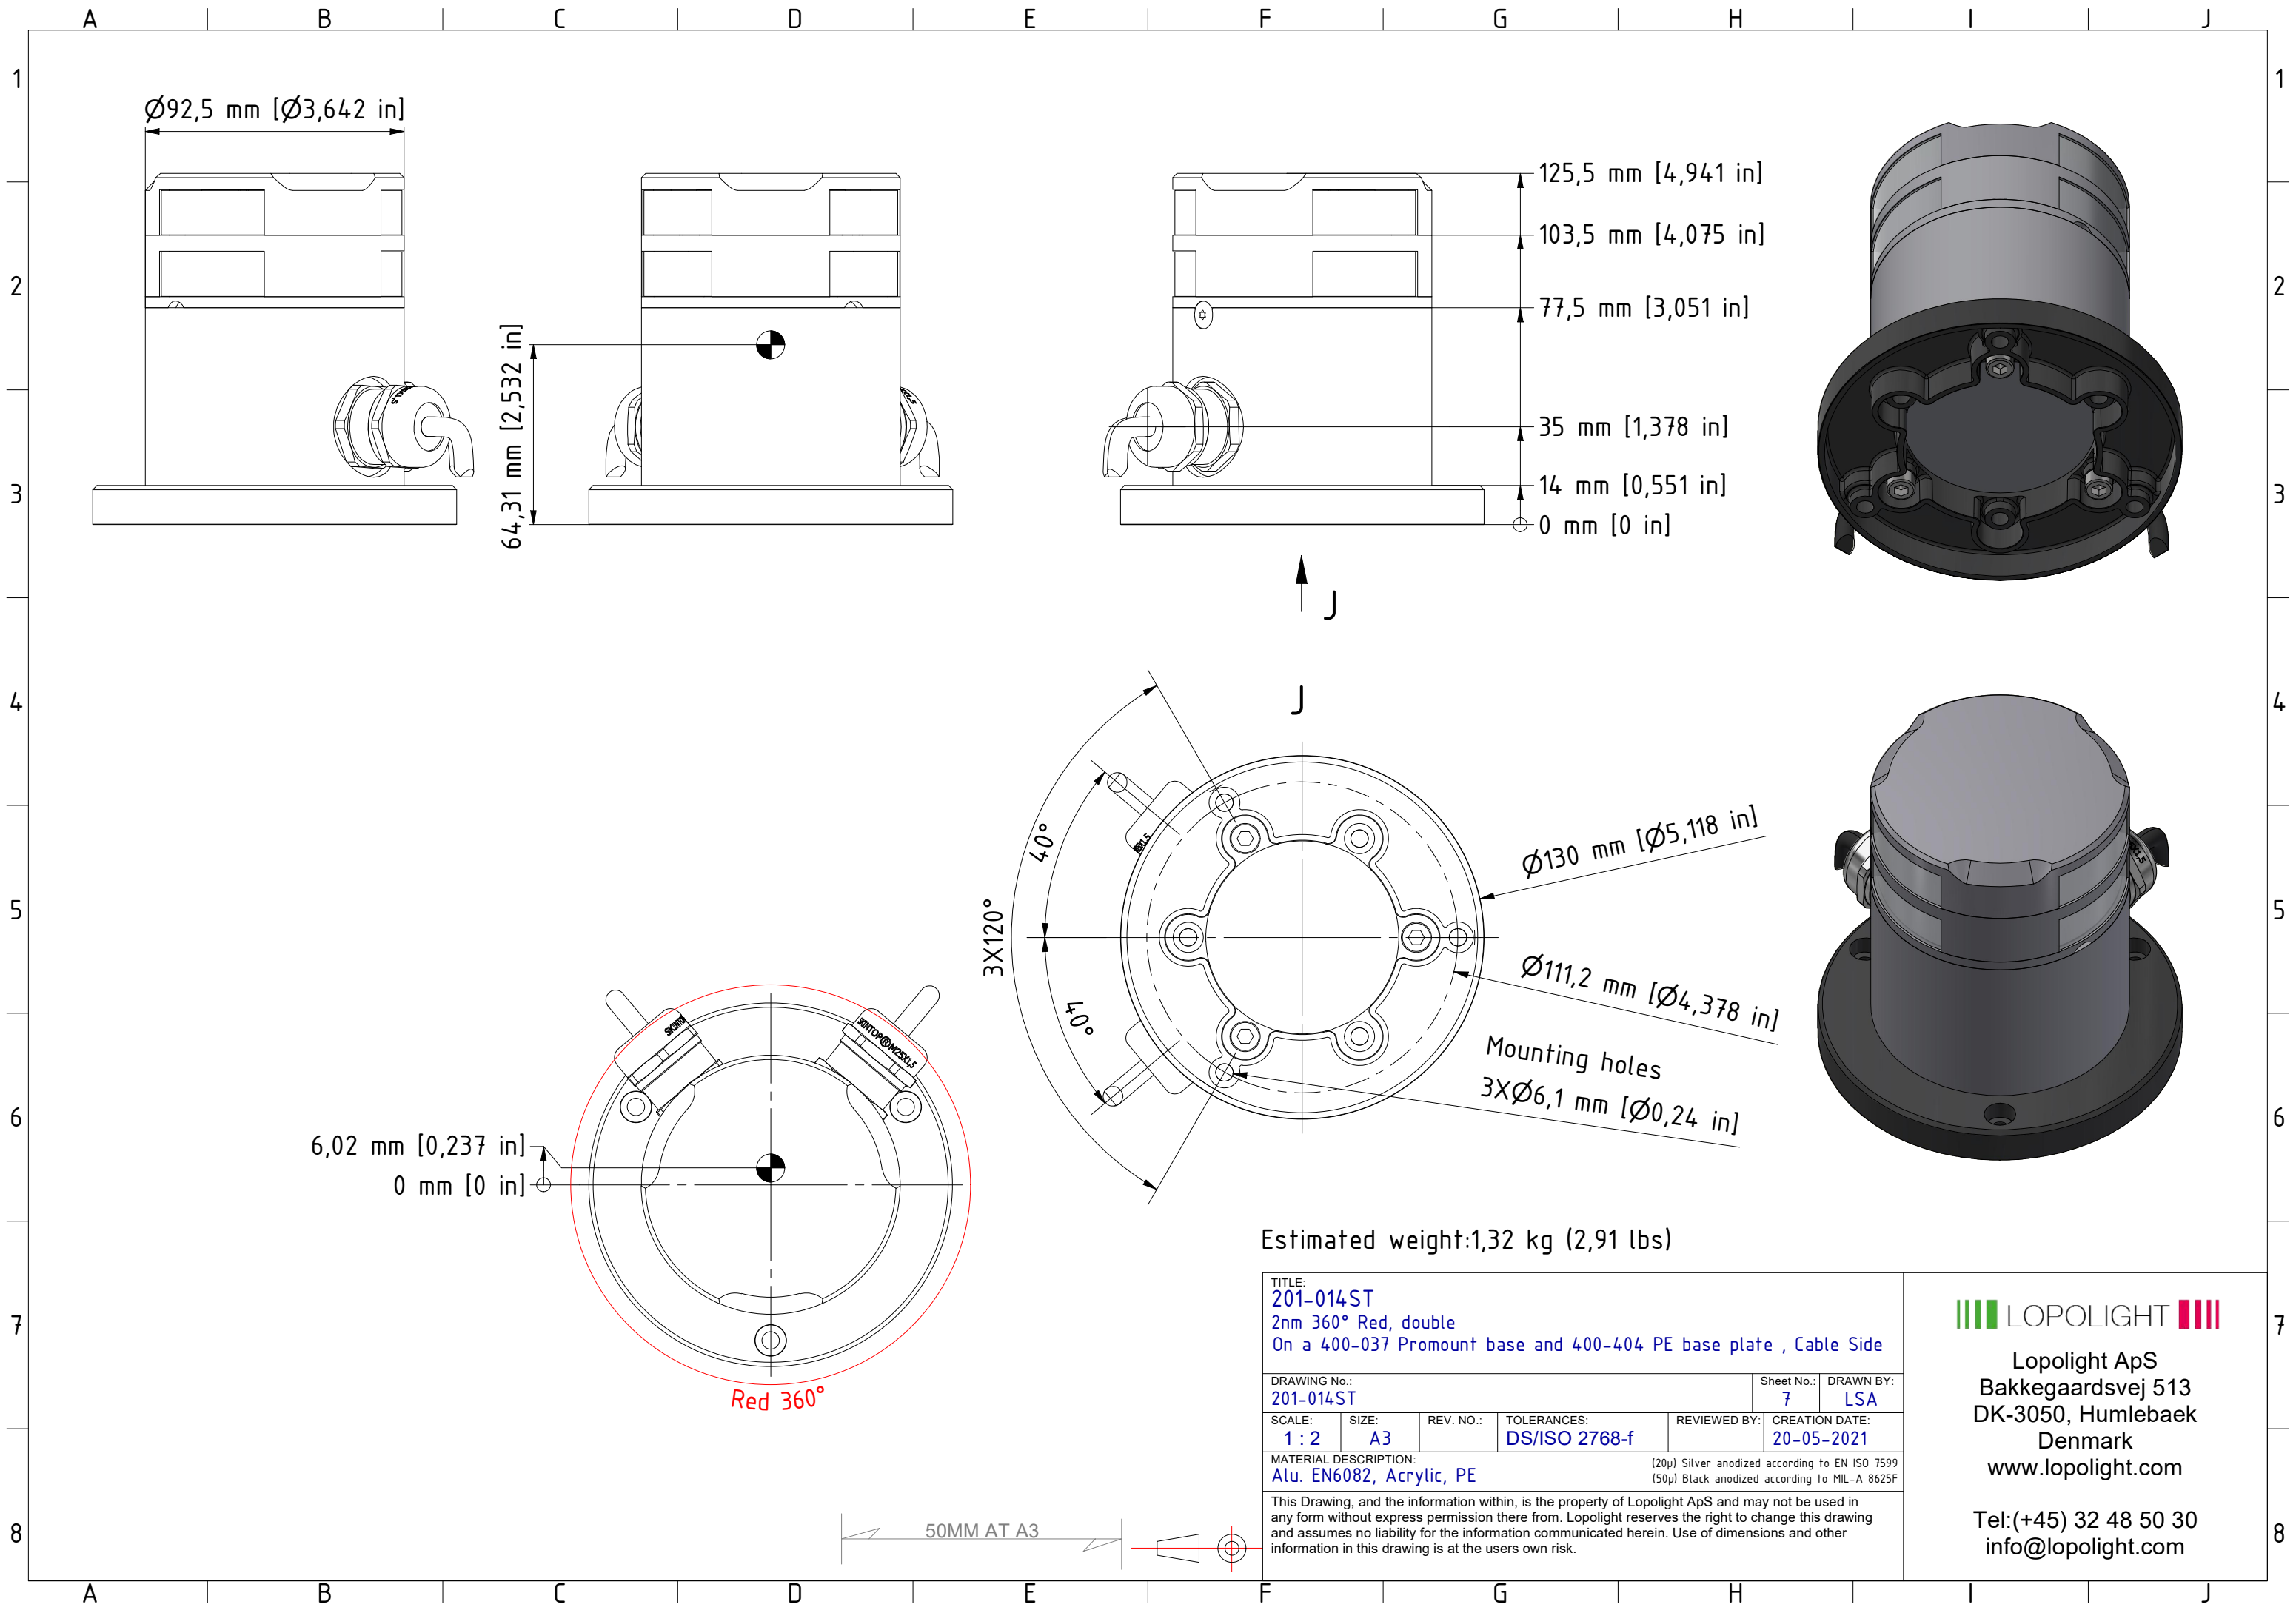

|                                                                                                                                                                                                                                                                                                                                                           |             |           |                              |                 |                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|------------------------------|-----------------|------------------------------|
| TITLE:<br>201-014ST<br>2nm 360° Red, double<br>On a 400-037 Promount base and 400-404 PE base plate , Cable Side                                                                                                                                                                                                                                          |             |           |                              |                 |                              |
| DRAWING No.:<br>201-014ST                                                                                                                                                                                                                                                                                                                                 |             |           |                              | Sheet No.:<br>7 | DRAWN BY:<br>LSA             |
| SCALE:<br>1 : 2                                                                                                                                                                                                                                                                                                                                           | SIZE:<br>A3 | REV. NO.: | TOLERANCES:<br>DS/ISO 2768-f | REVIEWED BY:    | CREATION DATE:<br>20-05-2021 |
| MATERIAL DESCRIPTION:<br>Alu. EN6082, Acrylic, PE                                                                                                                                                                                                                                                                                                         |             |           |                              |                 |                              |
| (20µ) Silver anodized according to EN ISO 7599<br>(50µ) Black anodized according to MIL-A 8625F                                                                                                                                                                                                                                                           |             |           |                              |                 |                              |
| This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk. |             |           |                              |                 |                              |

**LOPOLIGHT**

Lopolight ApS  
Bakkegaardsvej 513  
DK-3050, Humlebaek  
Denmark  
www.lopolight.com

Tel:(+45) 32 48 50 30  
info@lopolight.com