


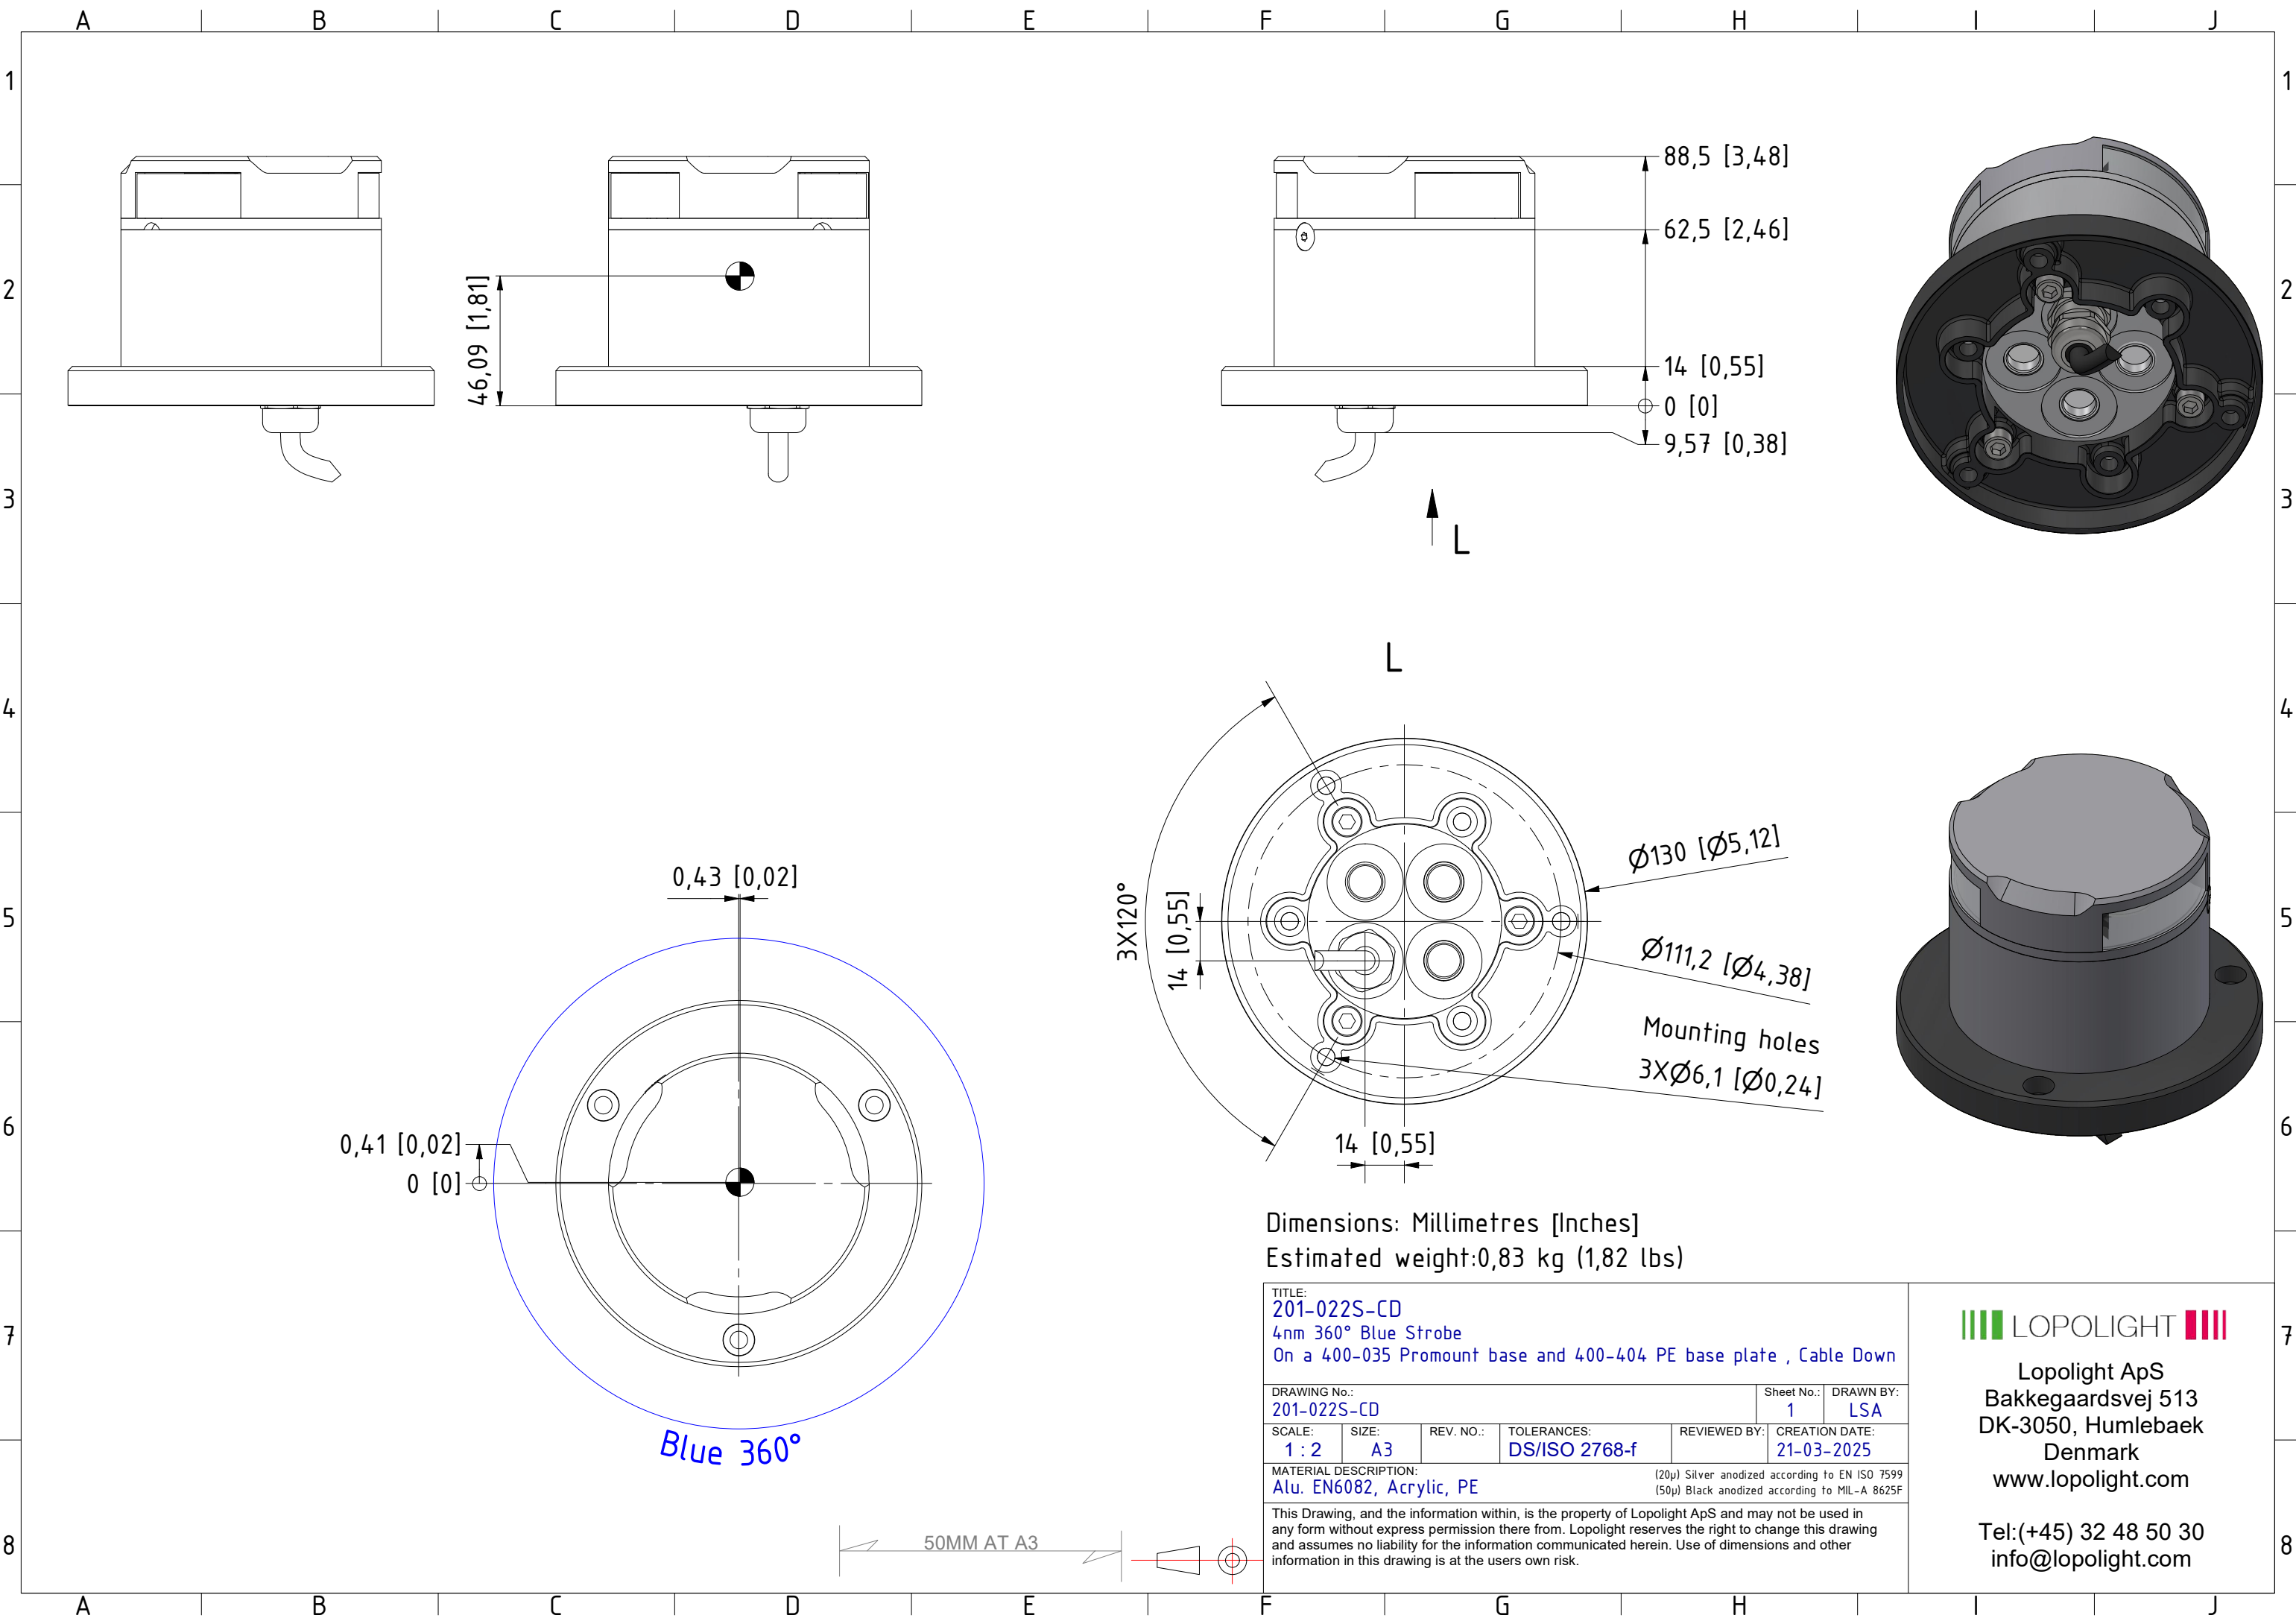


Dimensions: Millimetres [Inches]
Estimated weight:0,83 kg (1,82 lbs)

TITLE: 201-022S-CD 4nm 360° Blue Strobe On a 400-035 Promount base and 400-404 PE base plate , Cable Down					
DRAWING No.: 201-022S-CD				Sheet No.: 1	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 21-03-2025
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.					

LOPOLIGHT





Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com

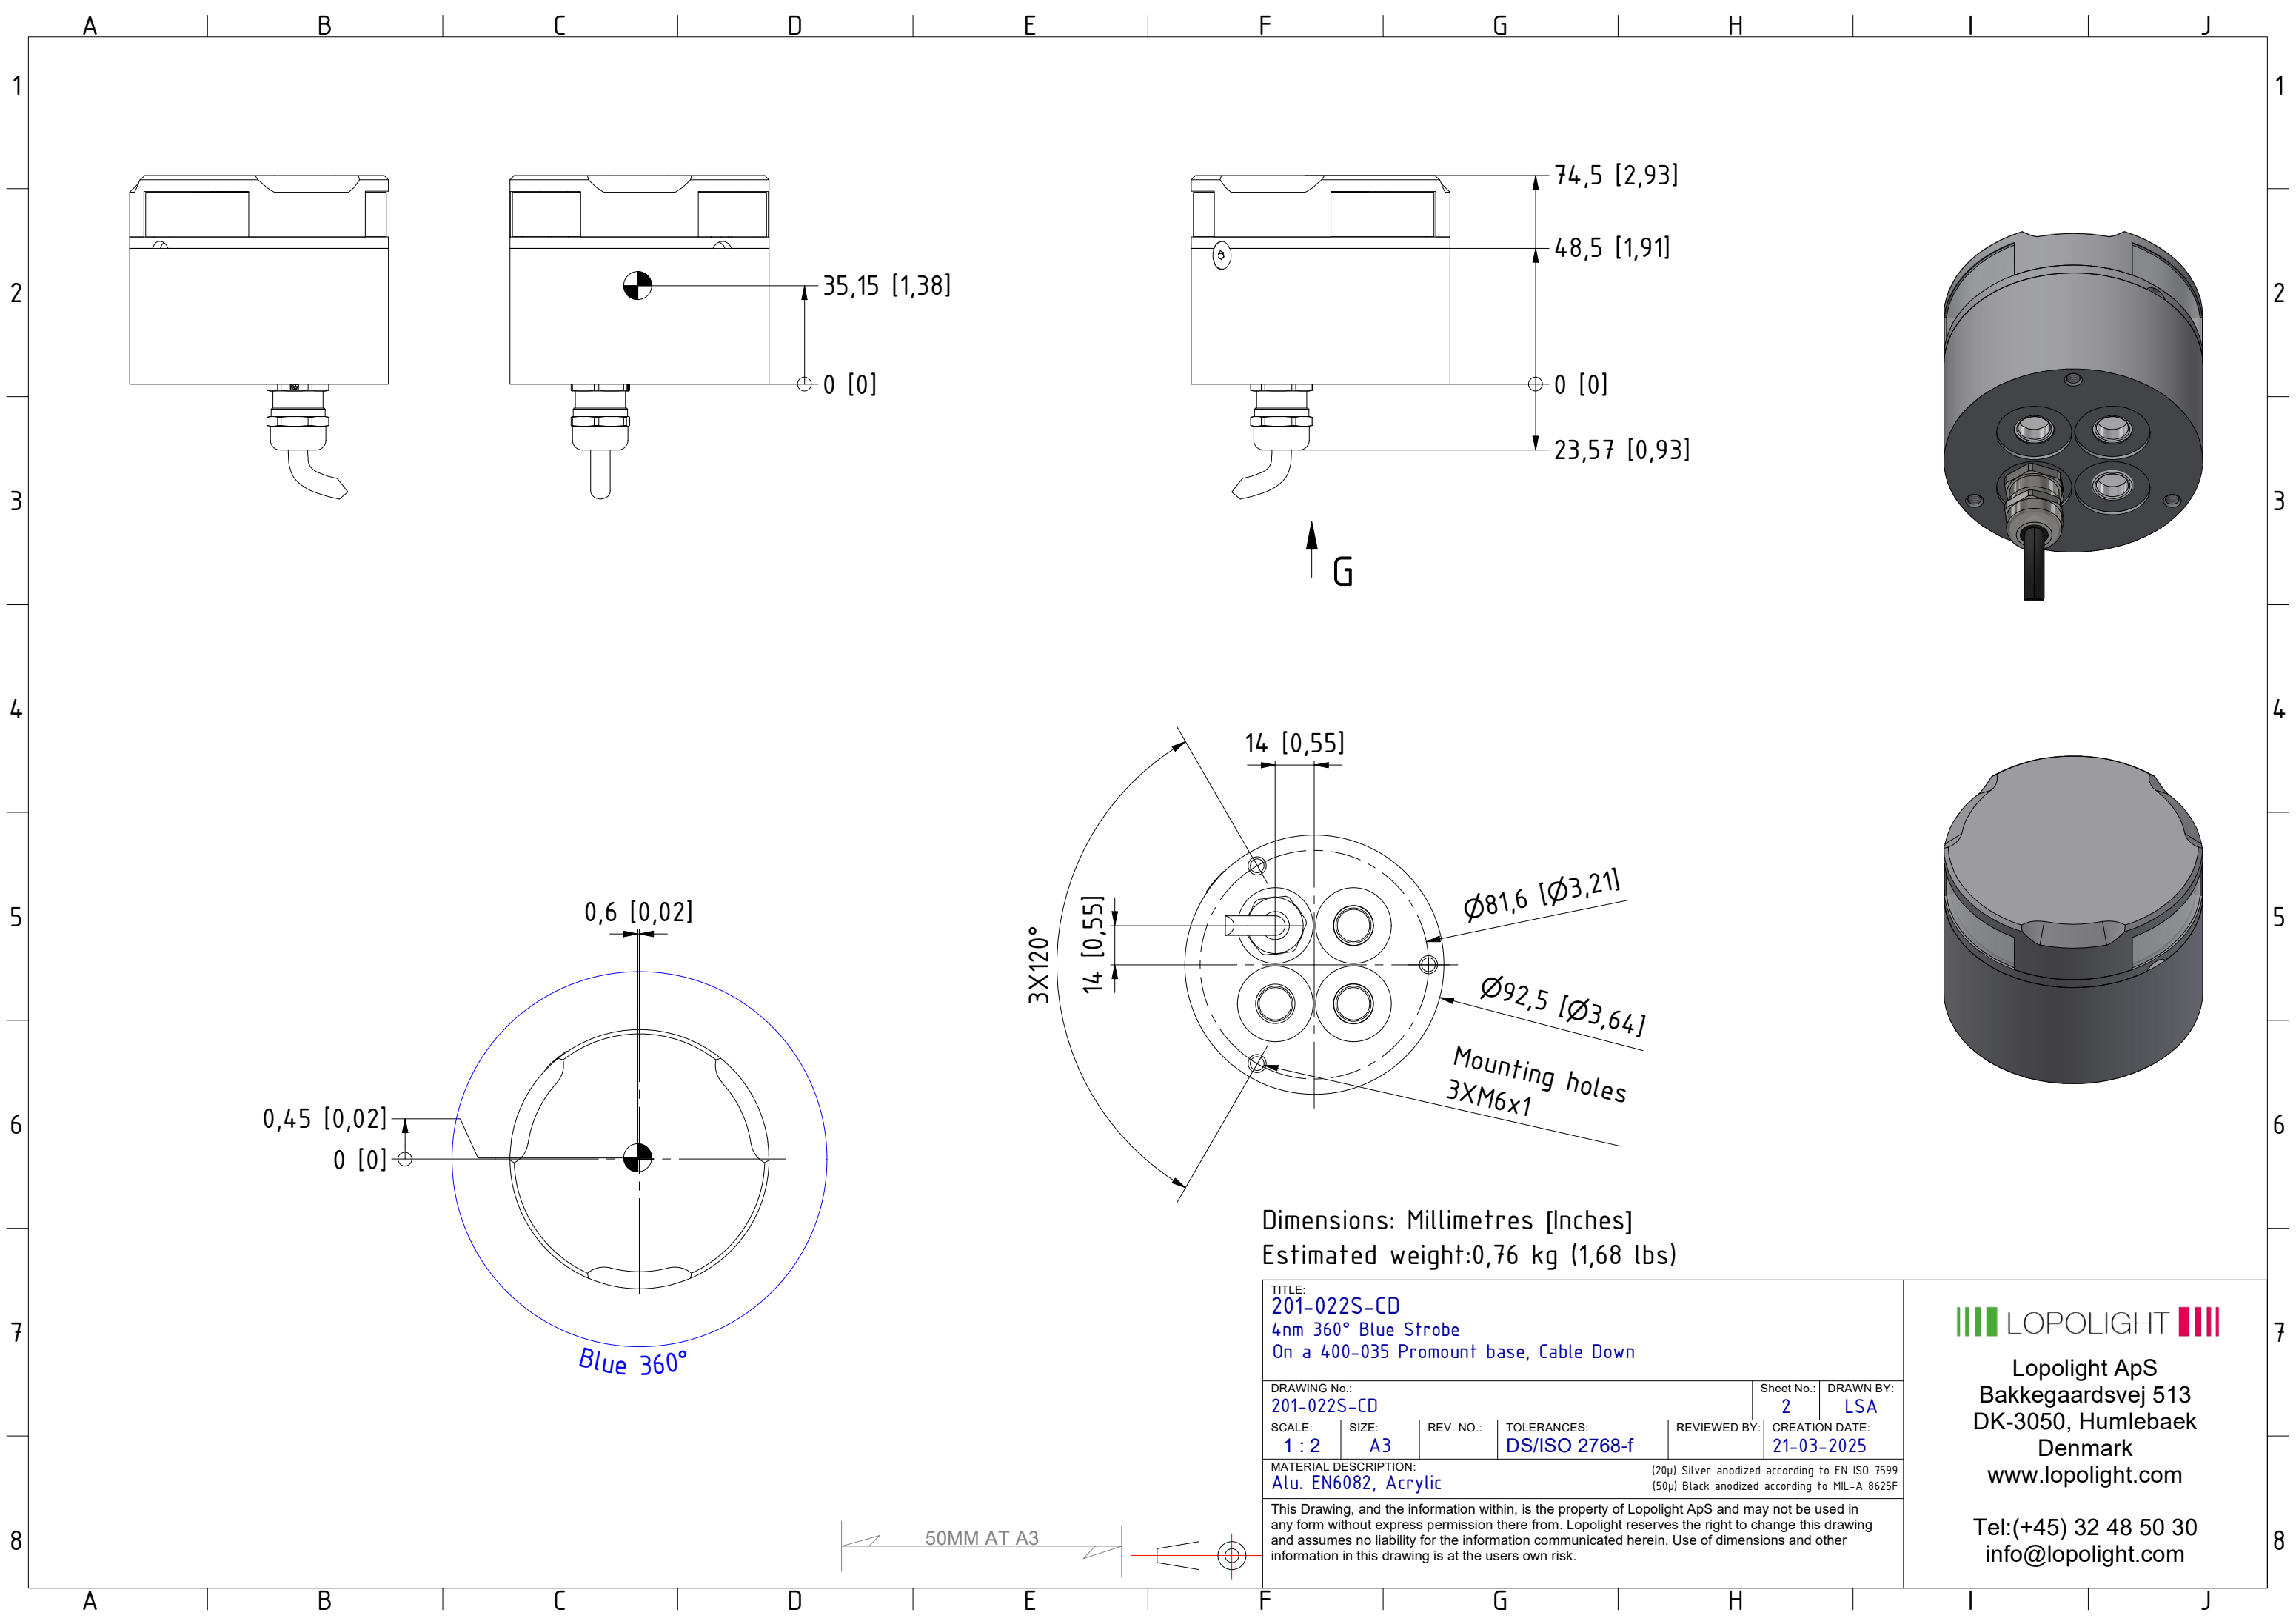

A B C D E F G H I J

1

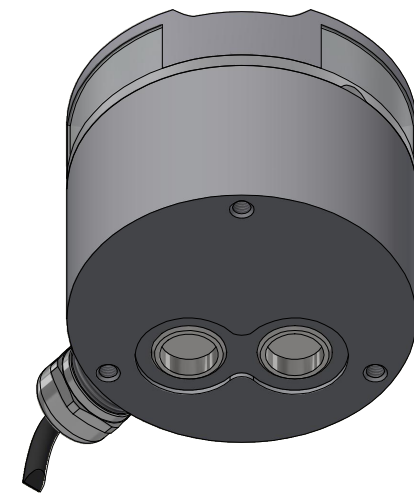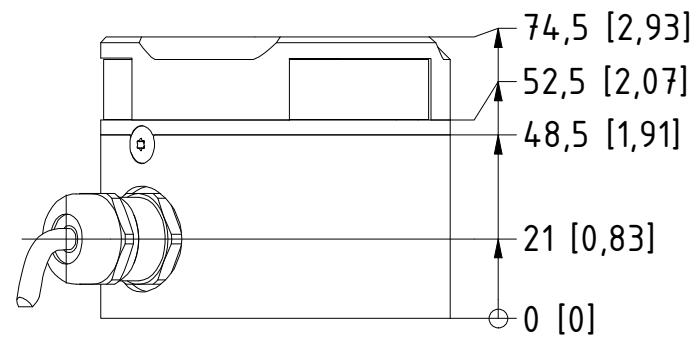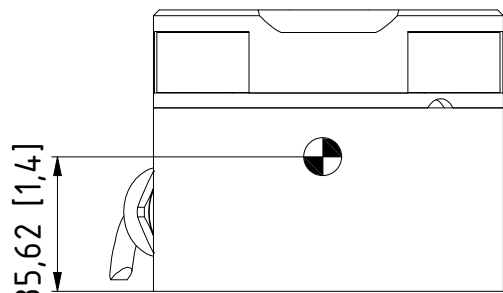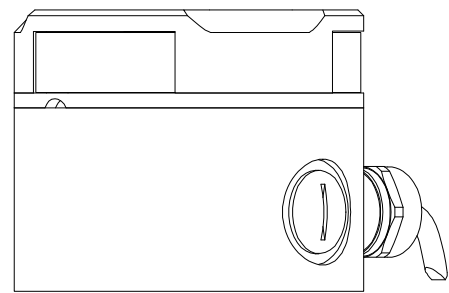

3

3




4

4



5

5

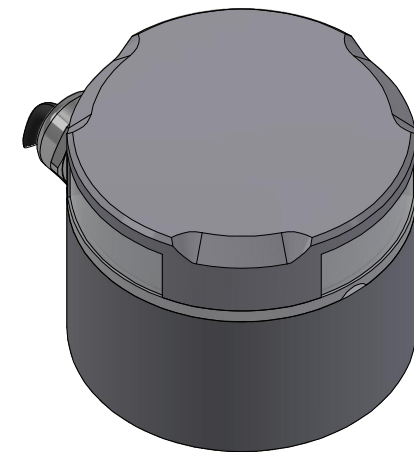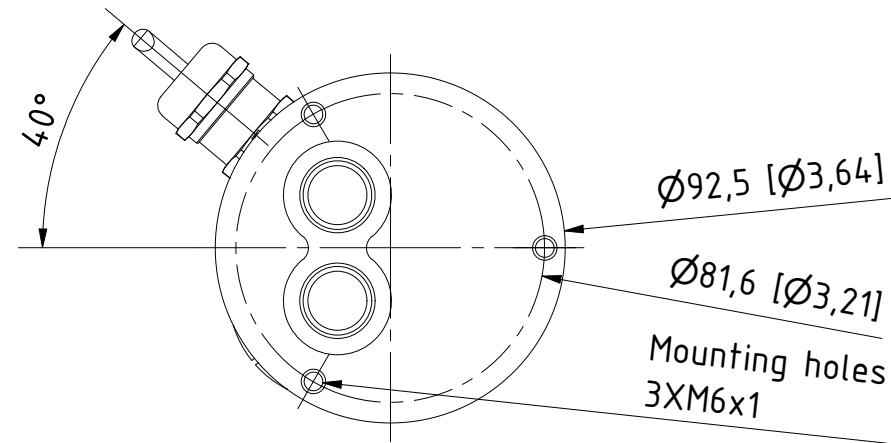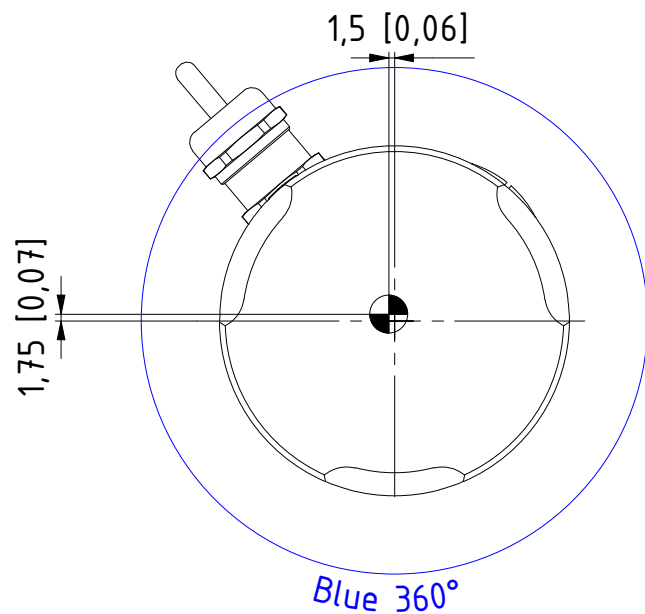

6

6

7

7

Dimensions: Millimetres [Inches]
Estimated weight:0,78 kg (1,72 lbs)

TITLE: 201-022S-CD 4nm 360° Blue Strobe On a 400-034 Promount base, Cable Side					
DRAWING No.: 201-022S-CD				Sheet No.: 3	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 21-03-2025
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.					



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com


Tel:(+45) 32 48 50 30
info@lopolight.com



A B C D E F G H I J

8

8

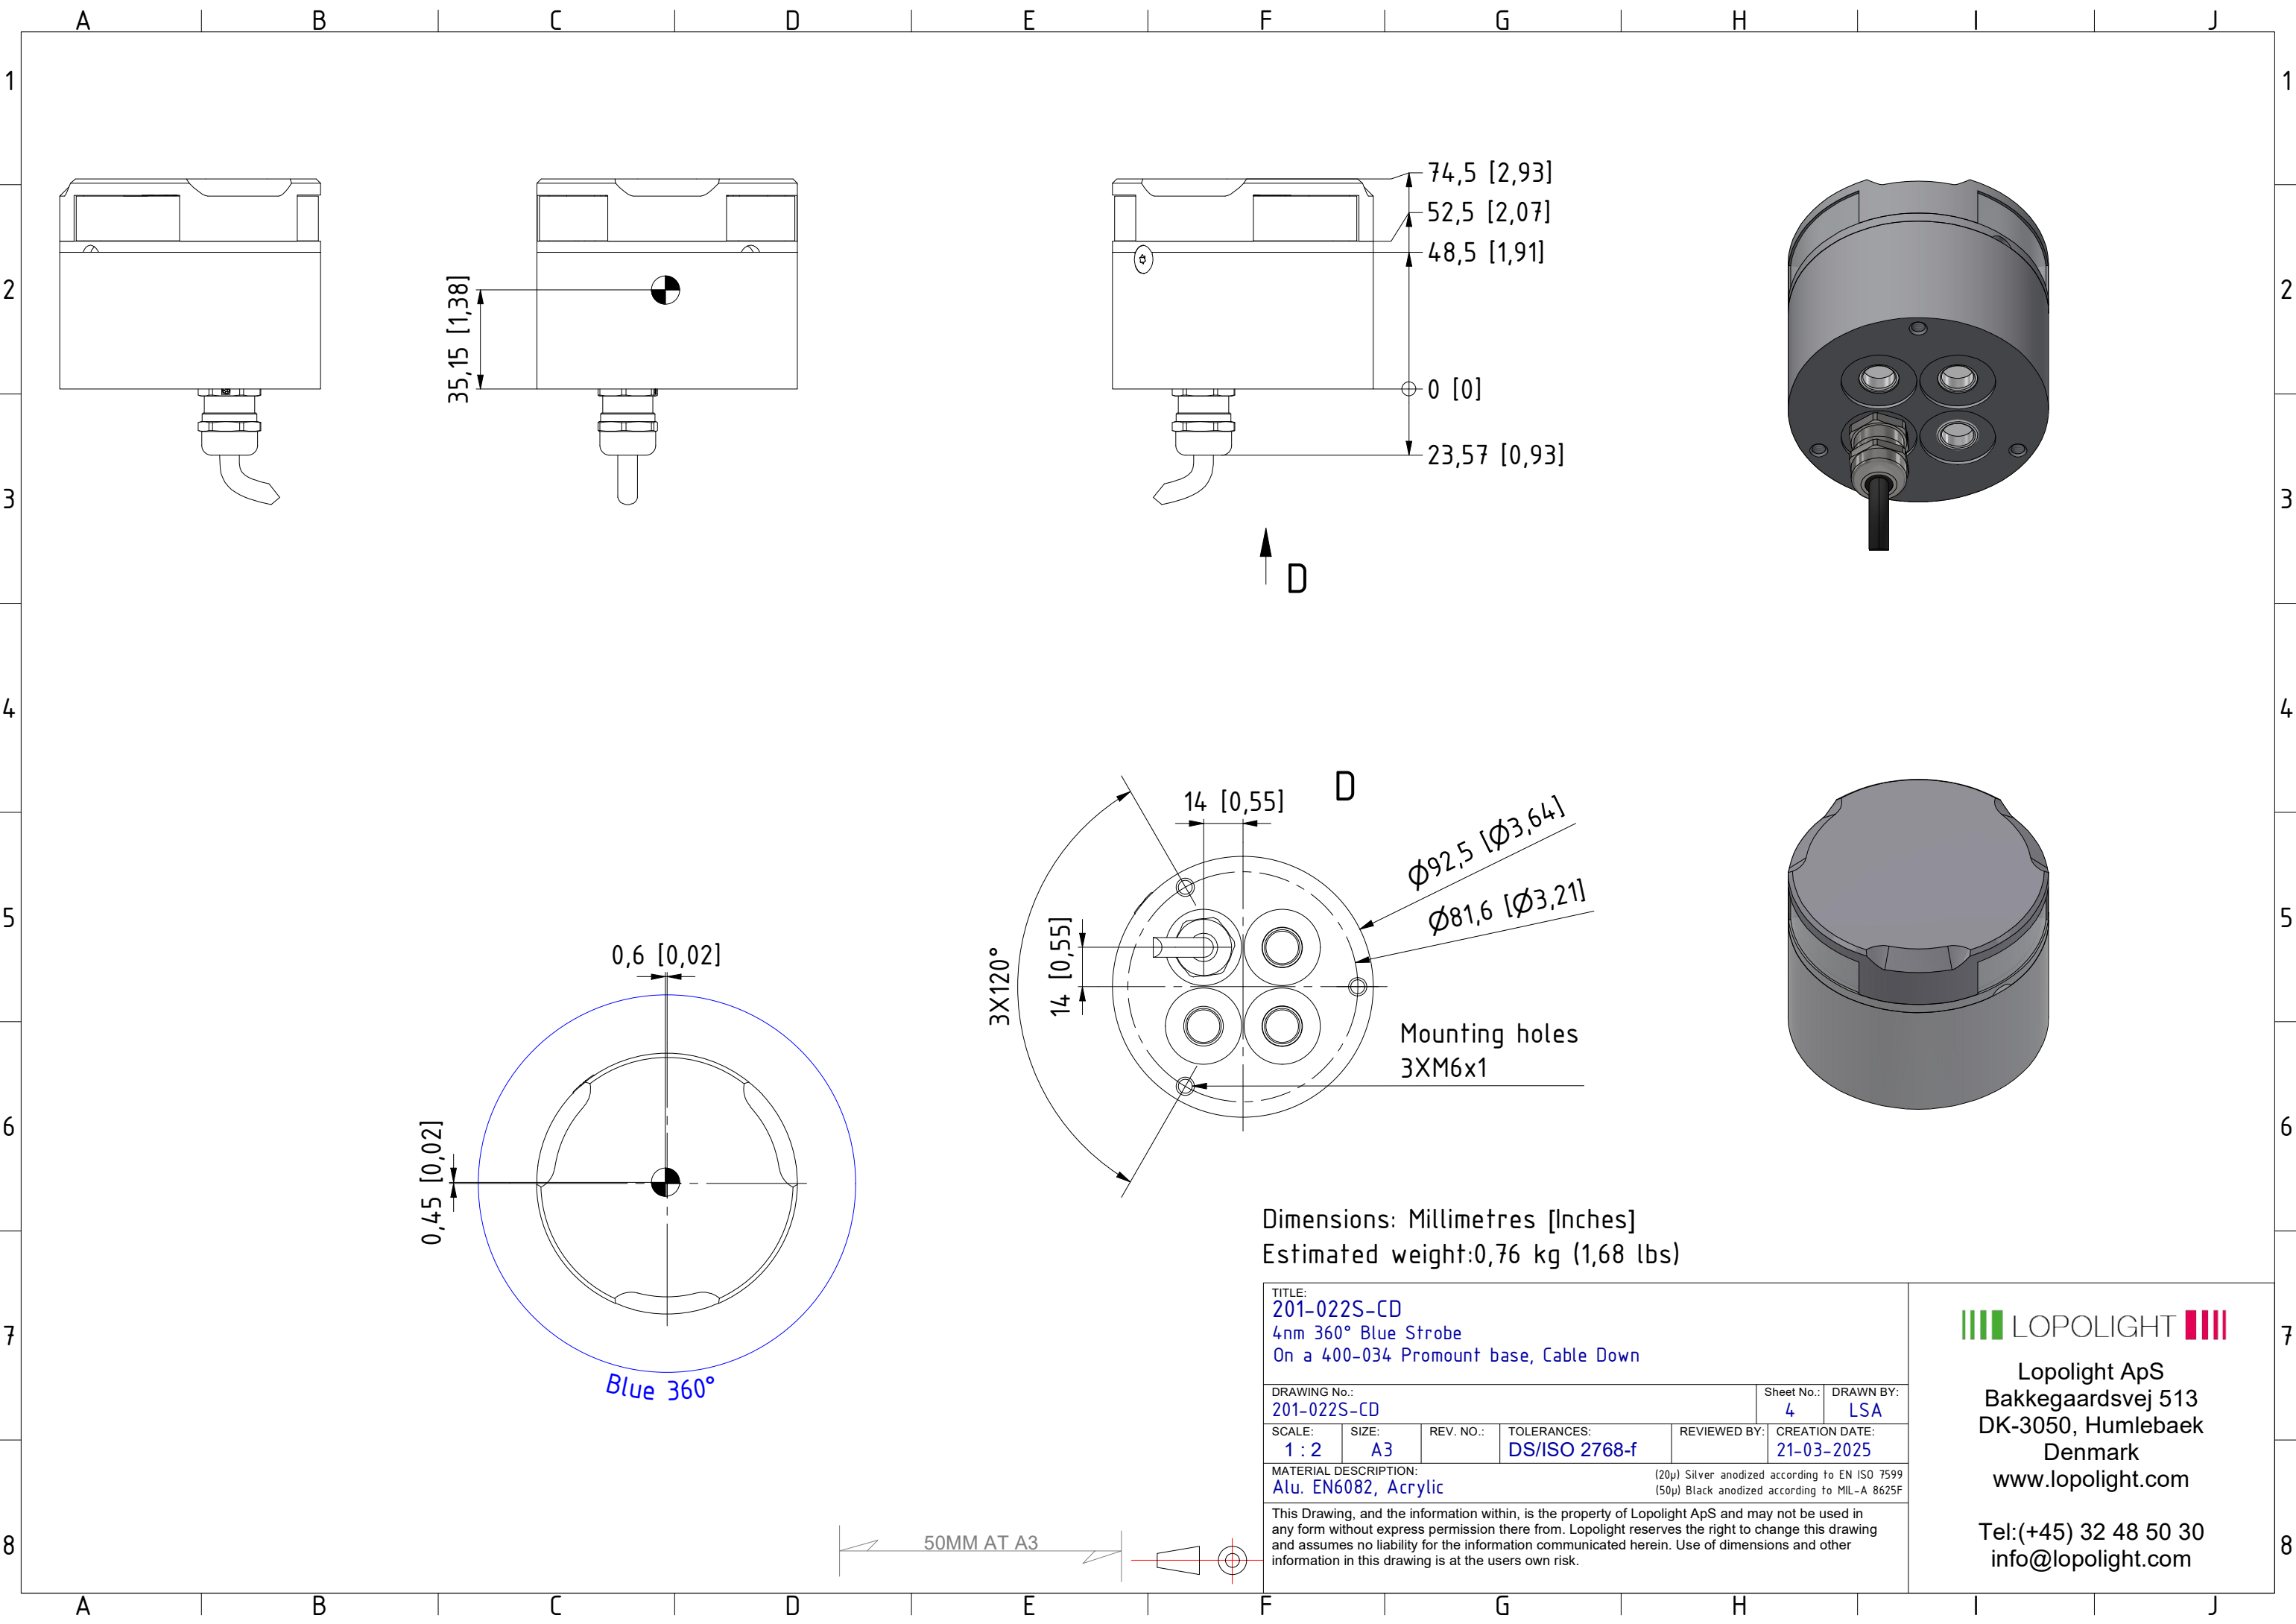

35,15 [1,38]

74,5 [2,93]
52,5 [2,07]
48,5 [1,91]

0 [0]
23,57 [0,93]

D

D

14 [0,55]

3X120°

14 [0,55]

Ø92,5 [Ø3,64]
Ø81,6 [Ø3,21]

Mounting holes
3XM6x1

0,6 [0,02]

0,45 [0,02]

Blue 360°

Dimensions: Millimetres [Inches]
Estimated weight:0,76 kg (1,68 lbs)

TITLE: 201-022S-CD 4nm 360° Blue Strobe On a 400-034 Promount base, Cable Down					
DRAWING No.: 201-022S-CD				Sheet No.: 4	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 21-03-2025
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					




This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com





Tel:(+45) 32 48 50 30
info@lopolight.com



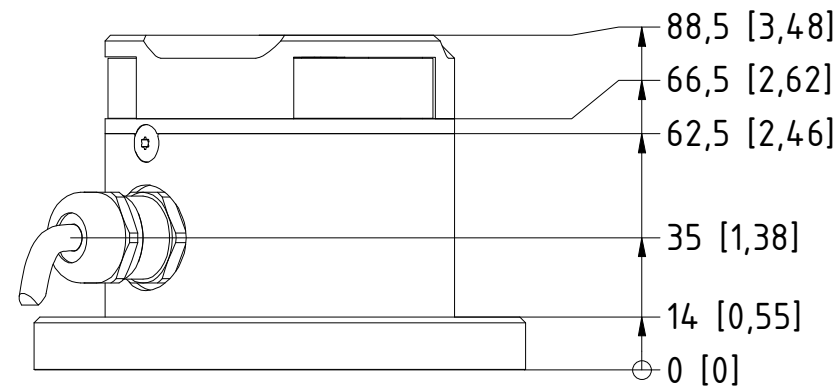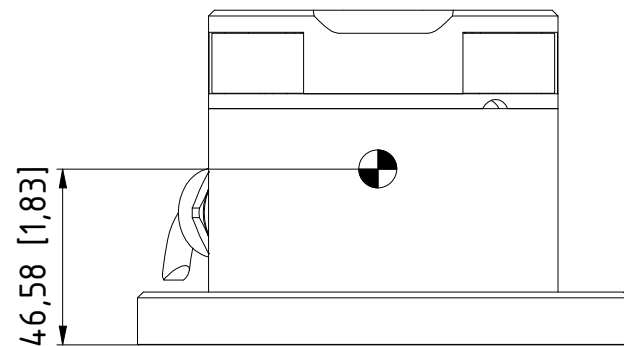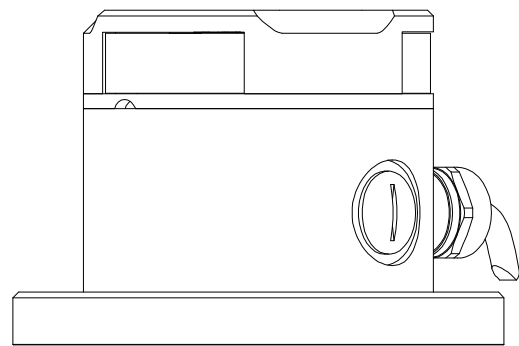

E

E

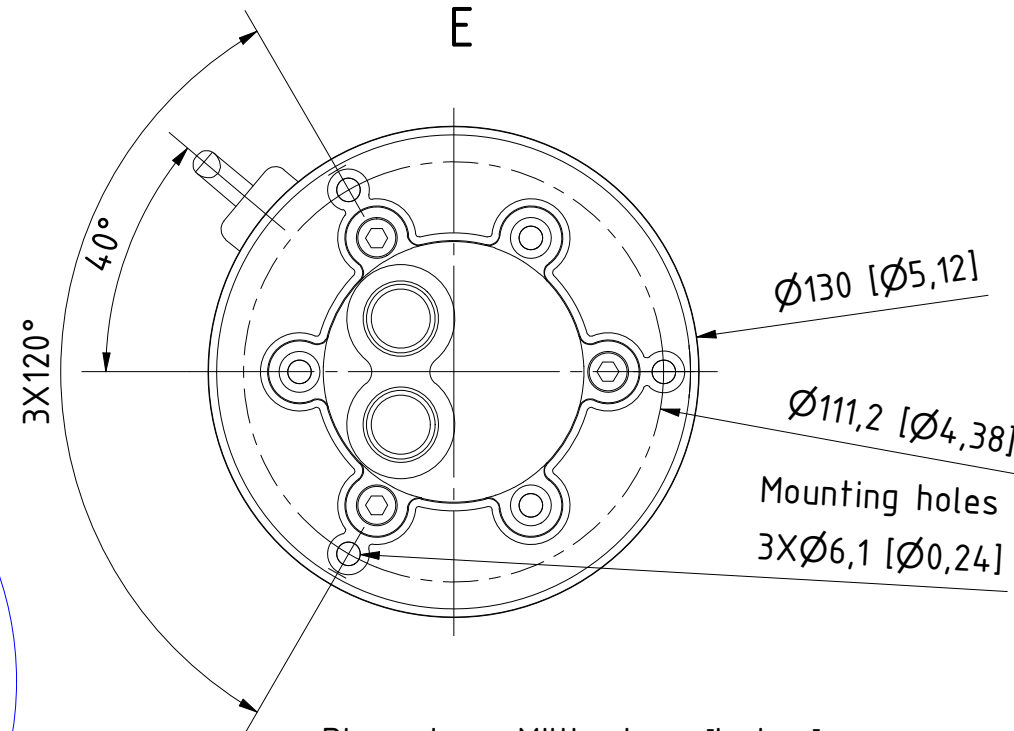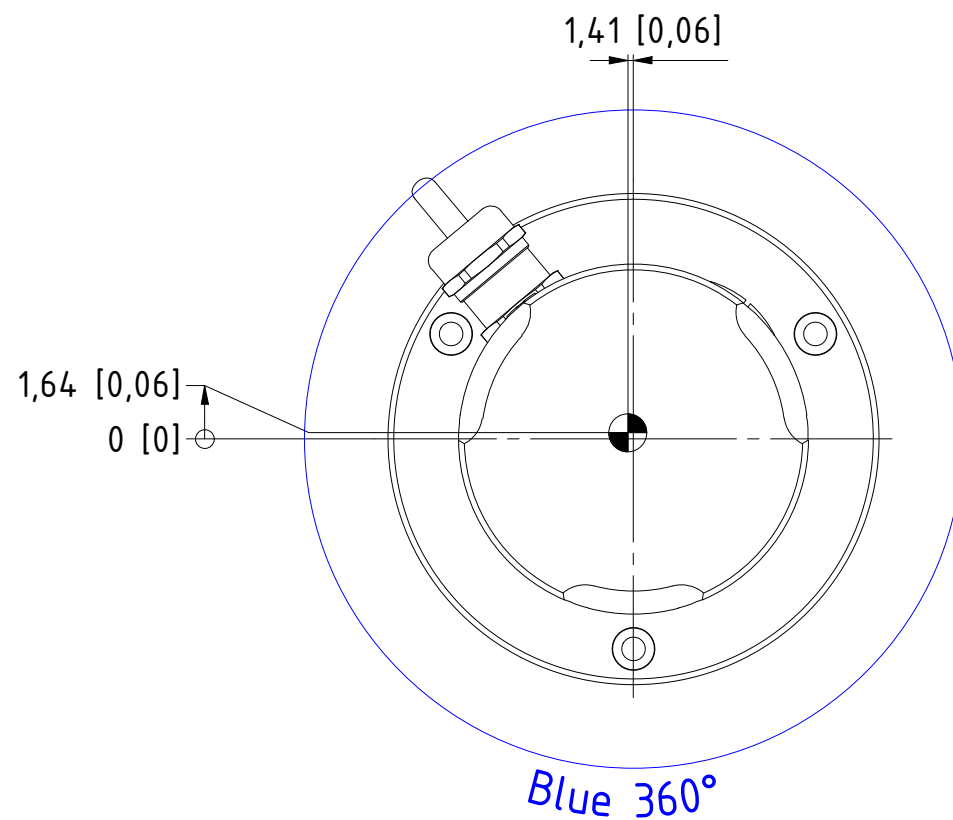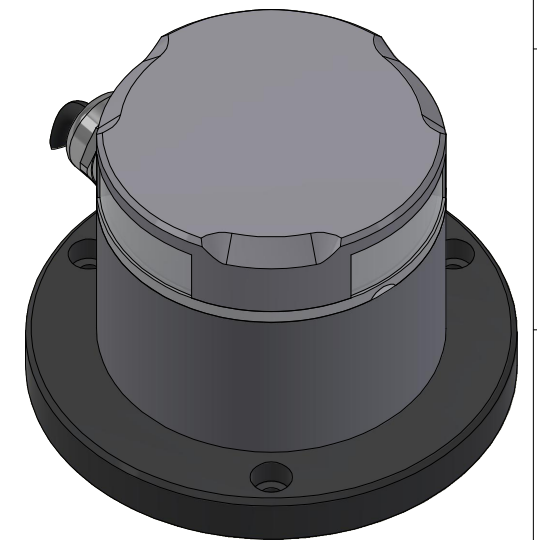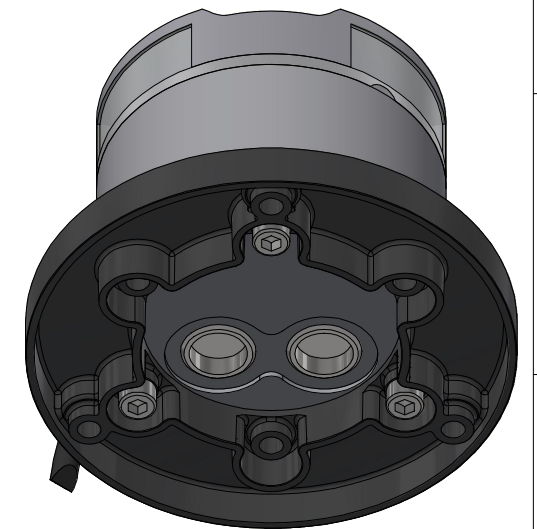

Dimensions: Millimetres [Inches]
Estimated weight:0,84 kg (1,86 lbs)

TITLE:
201-022S-CD
4nm 360° Blue Strobe
On a 400-034 Promount base and 400-404 PE base plate, Cable Side

DRAWING No.: 201-022S-CD Sheet No.: 5 DRAWN BY: LSA

SCALE: 1 : 2 SIZE: A3 REV. NO.: TOLERANCES: DS/ISO 2768-f REVIEWED BY: CREATION DATE: 21-03-2025

MATERIAL DESCRIPTION:
Alu. EN6082, Acrylic, PE (20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F







This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com



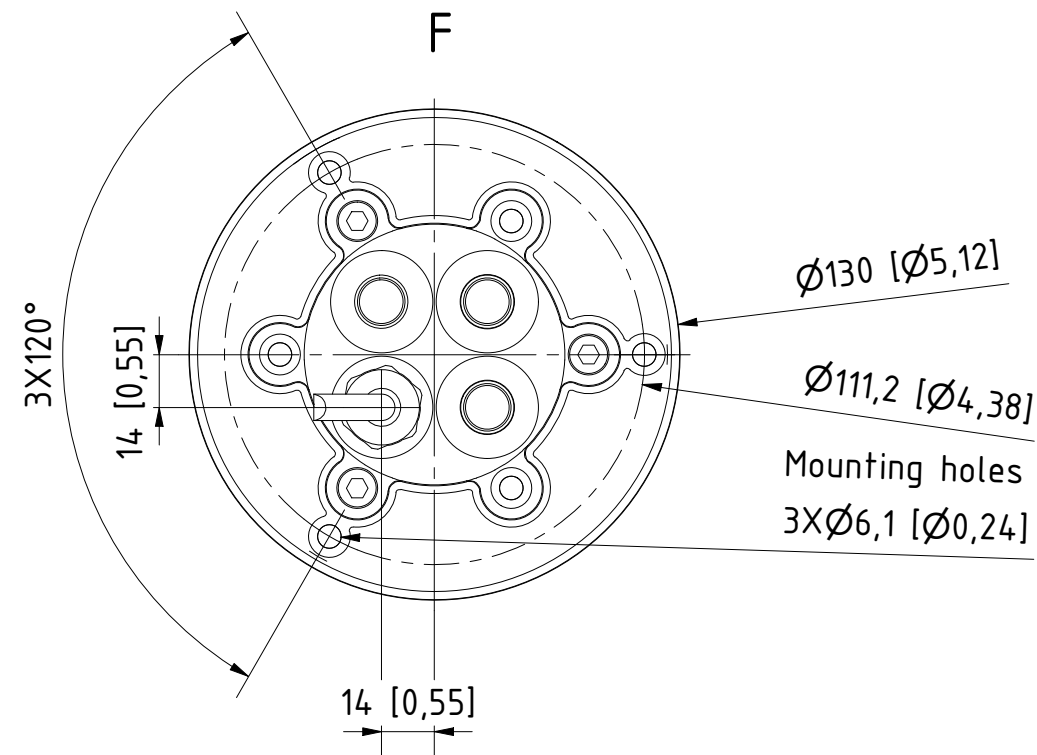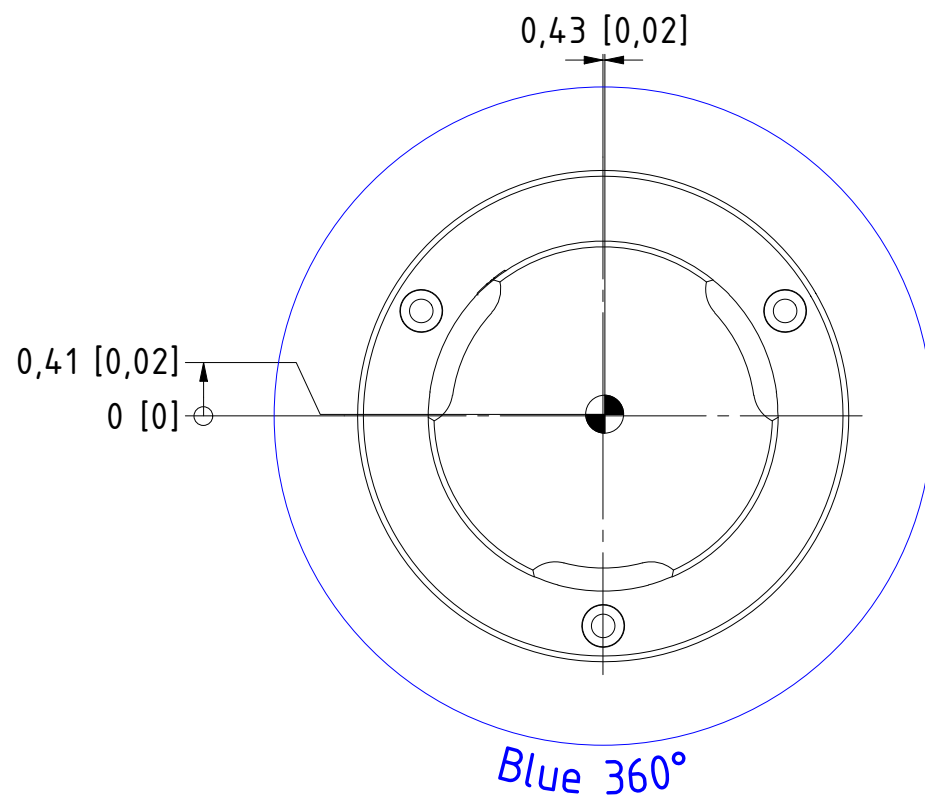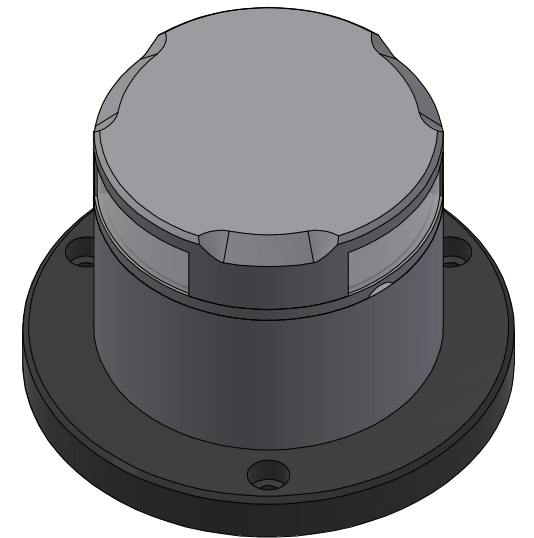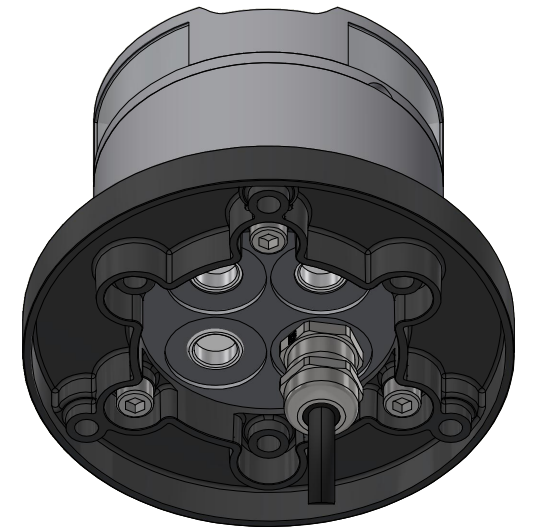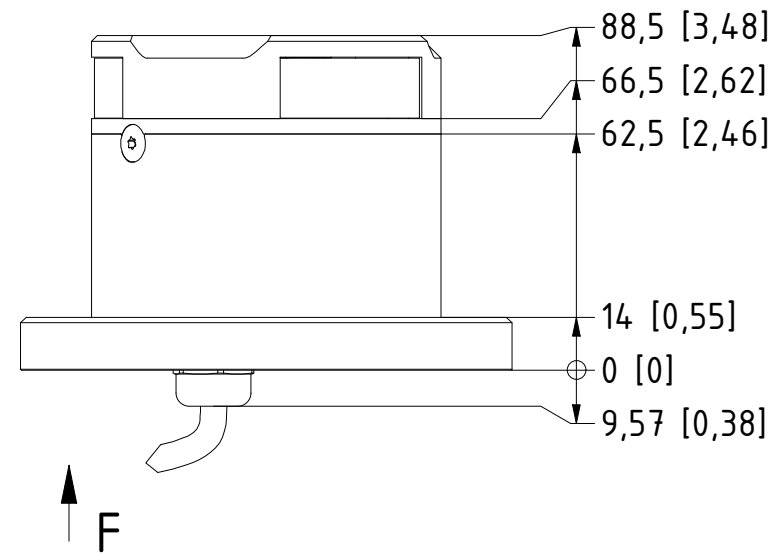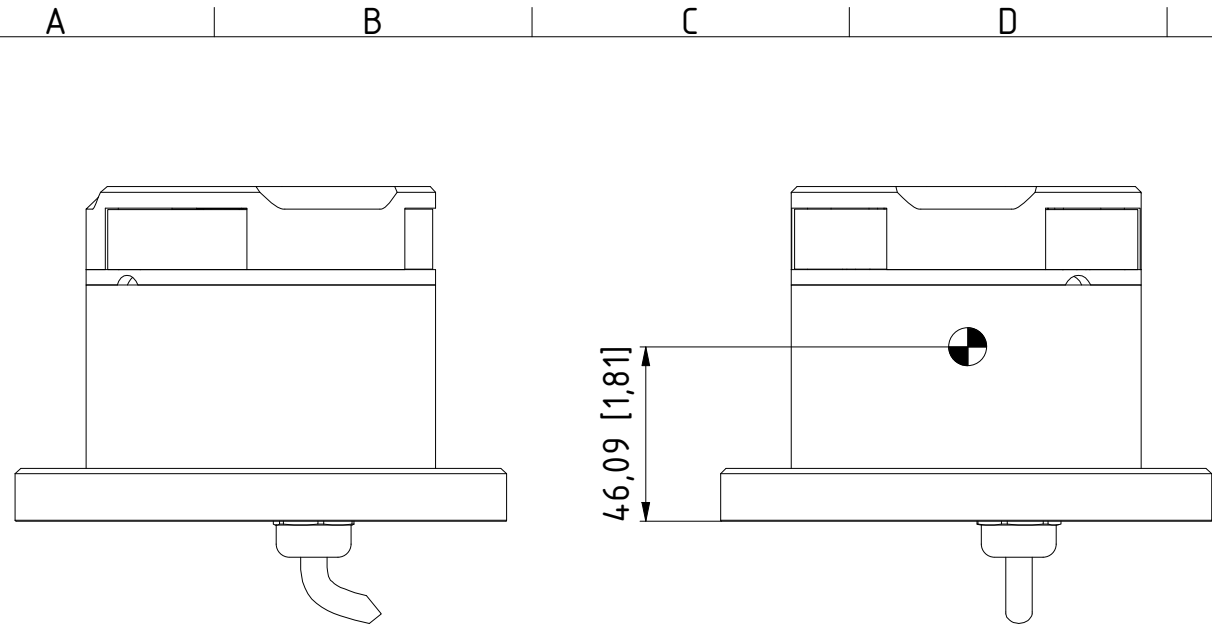

Dimensions: Millimetres [Inches]
Estimated weight:0,83 kg (1,82 lbs)

TITLE: 201-022S-CD 4nm 360° Blue Strobe On a 400-034 Promount base and 400-404 PE base plate, Cable Down					
DRAWING No.: 201-022S-CD				Sheet No.: 6	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 21-03-2025
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE (20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					




This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com



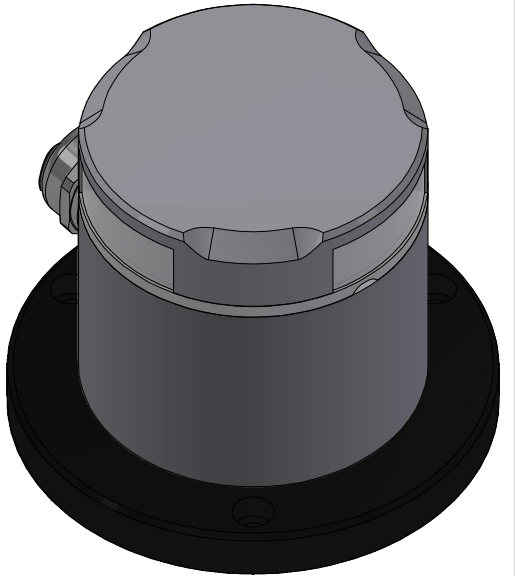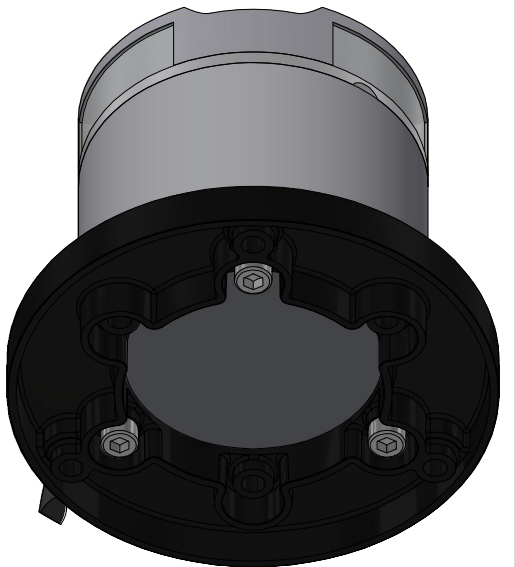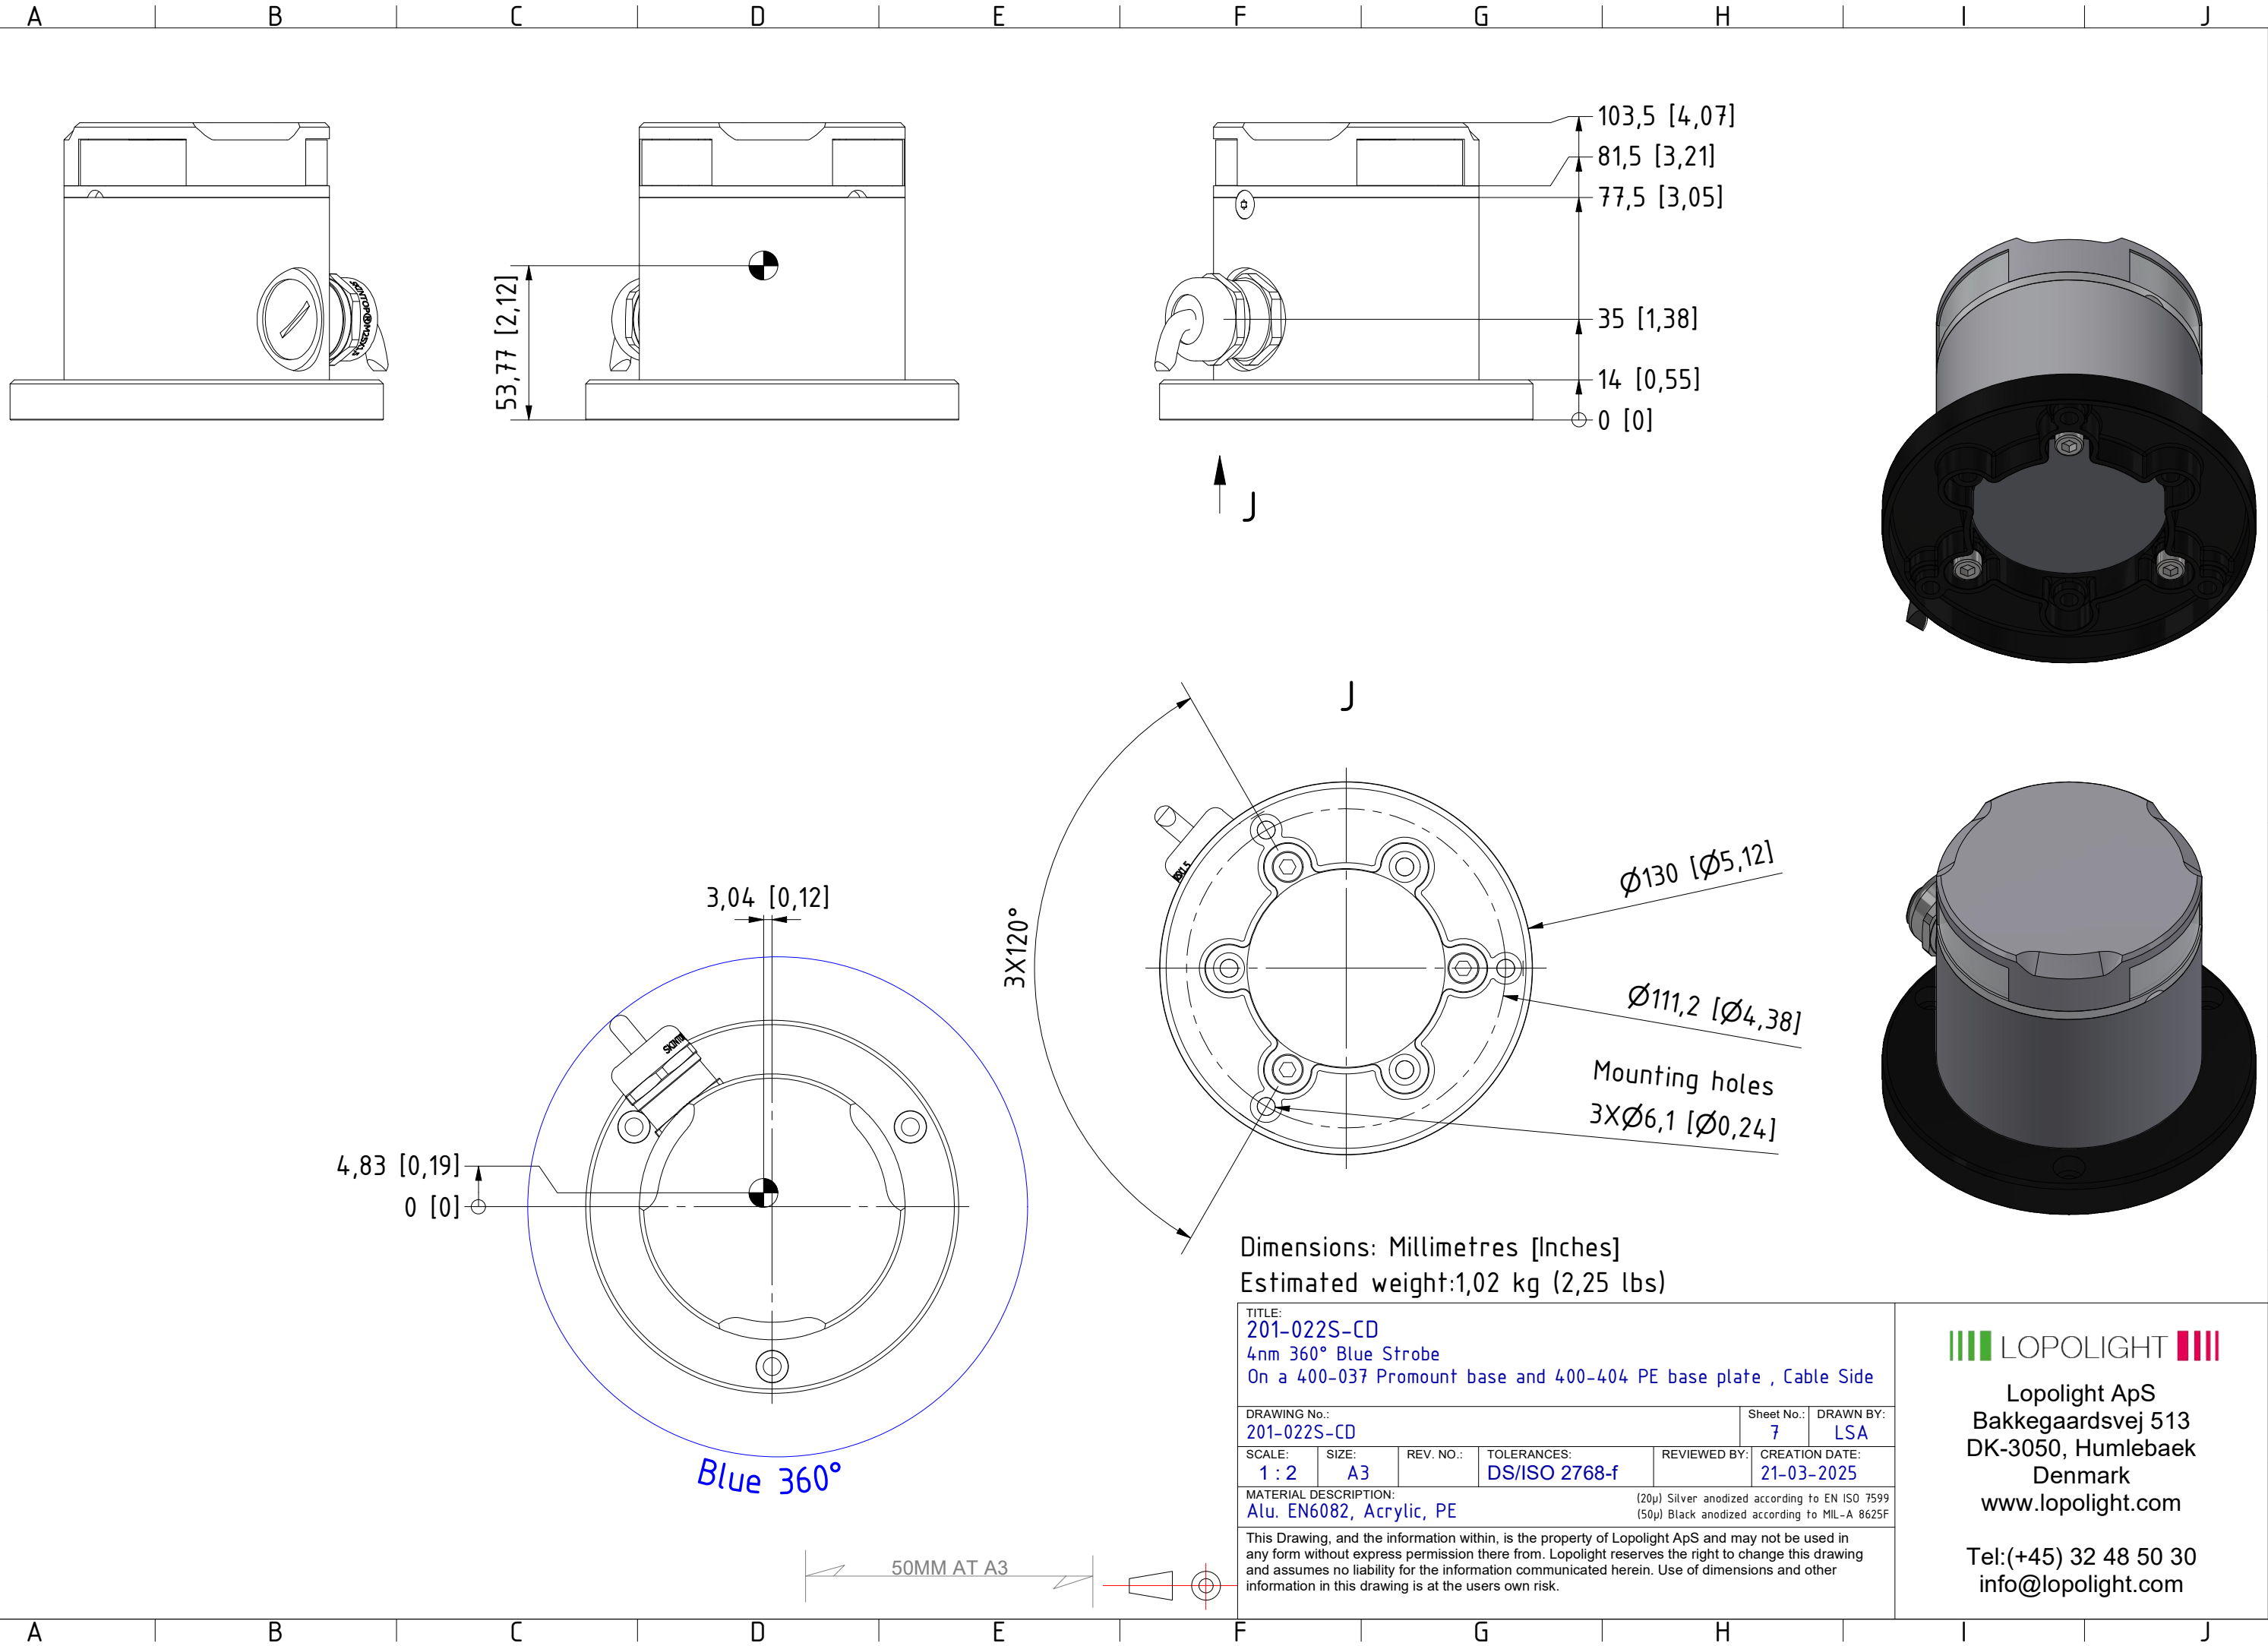

Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel: (+45) 32 48 50 30
info@lopolight.com