
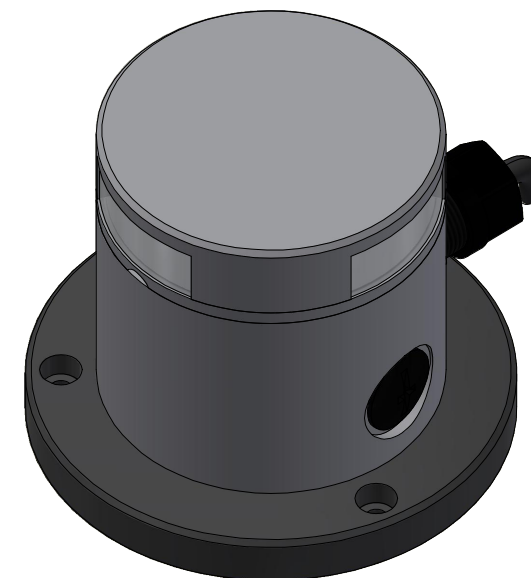
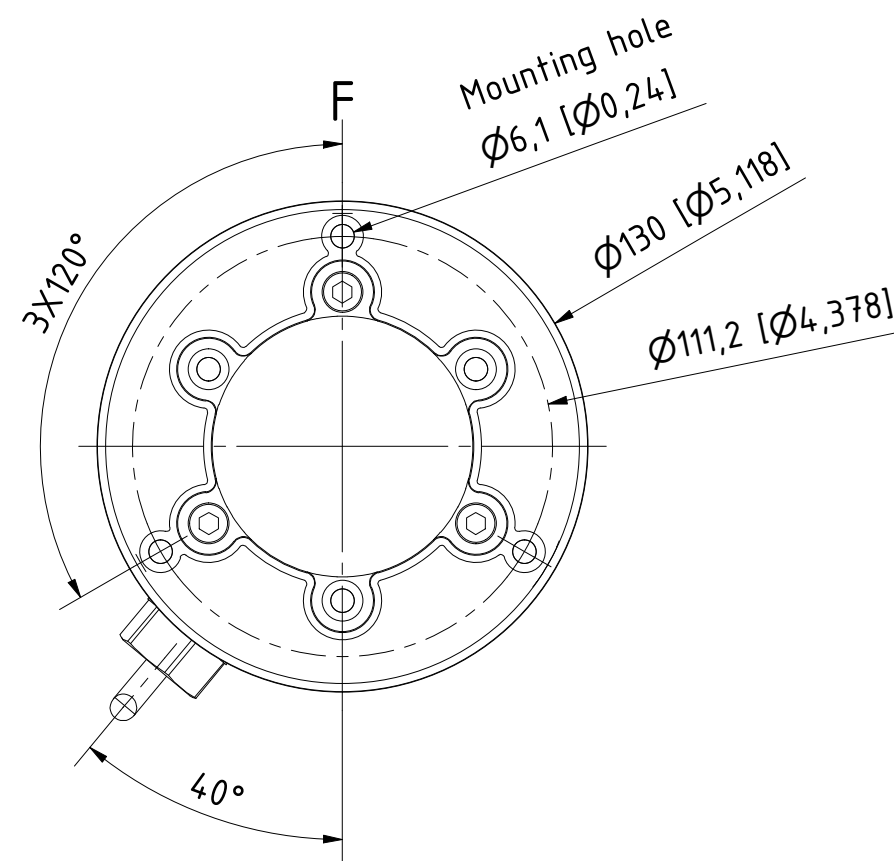
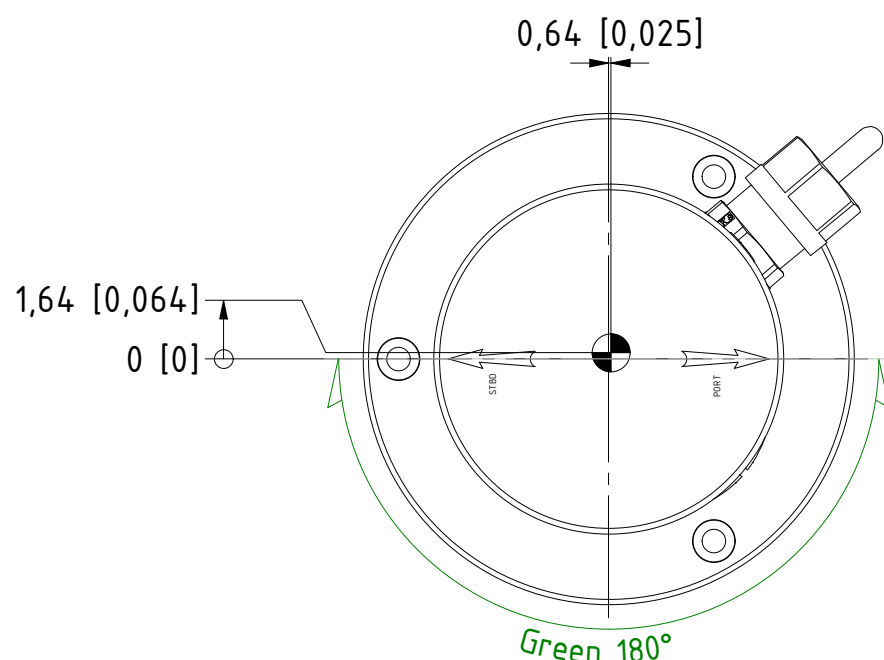
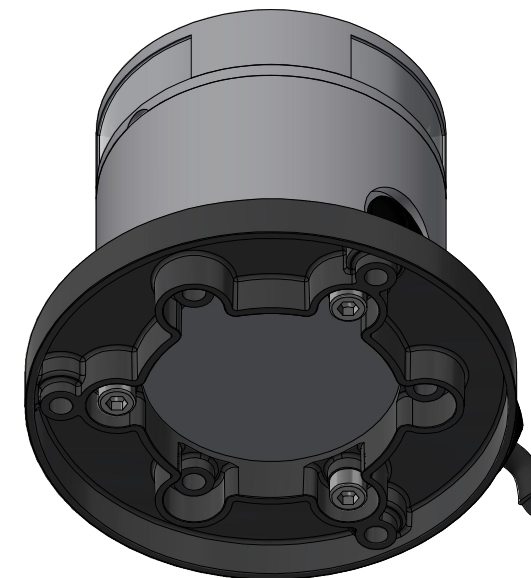
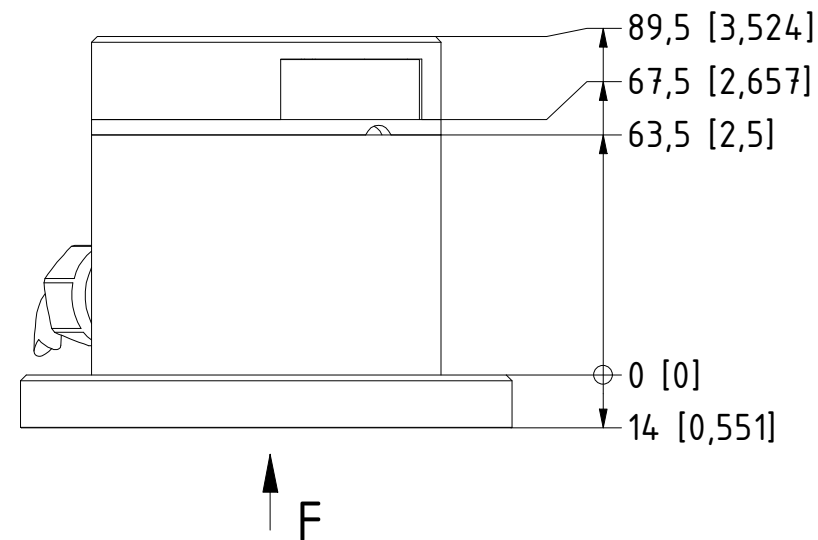


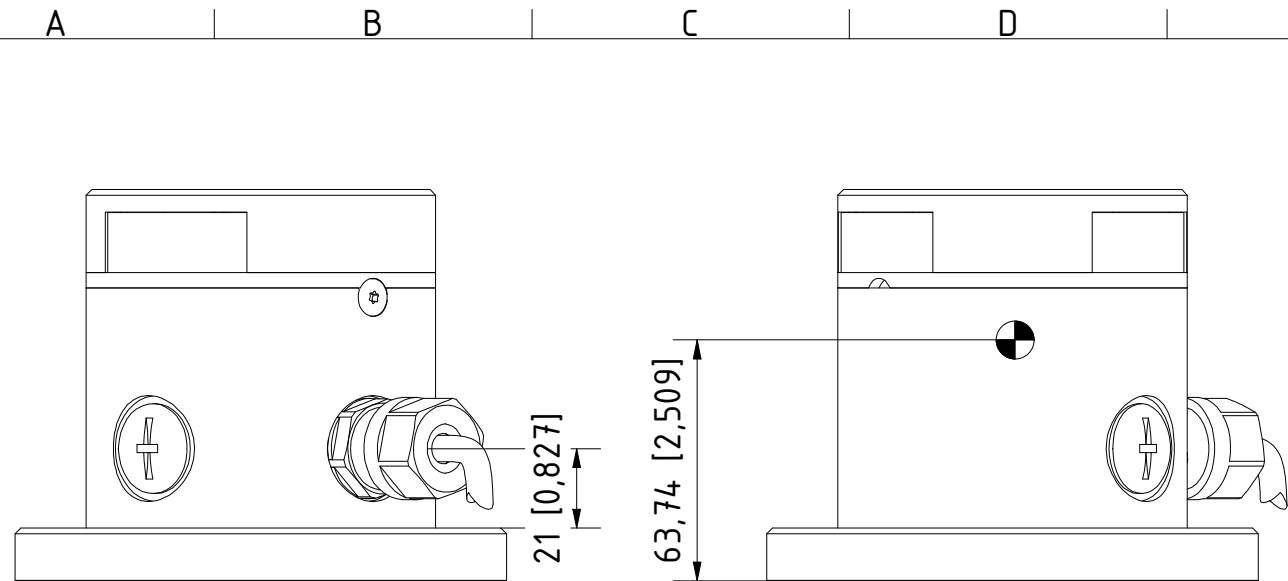

Dimensions : Millimetres [Inches]
Estimated weight:0,66 kg (1,46 lbs)

TITLE:
300-115G2-PRO-I-180 / 301-115-PRO-I-180
3nm 180° Green, ice class, black anodized
On 400-404 PE base plate, Cable Side


DRAWING No.: 300-115G2-PRO-I-180 / 301-115-PRO-I-180		Sheet No.: 1		DRAWN BY: LSA	
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 16-04-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, POM, PE					

(20µ) Silver anodized according to EN ISO 7599
(50µ) Black anodized according to MIL-A 8625F
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com

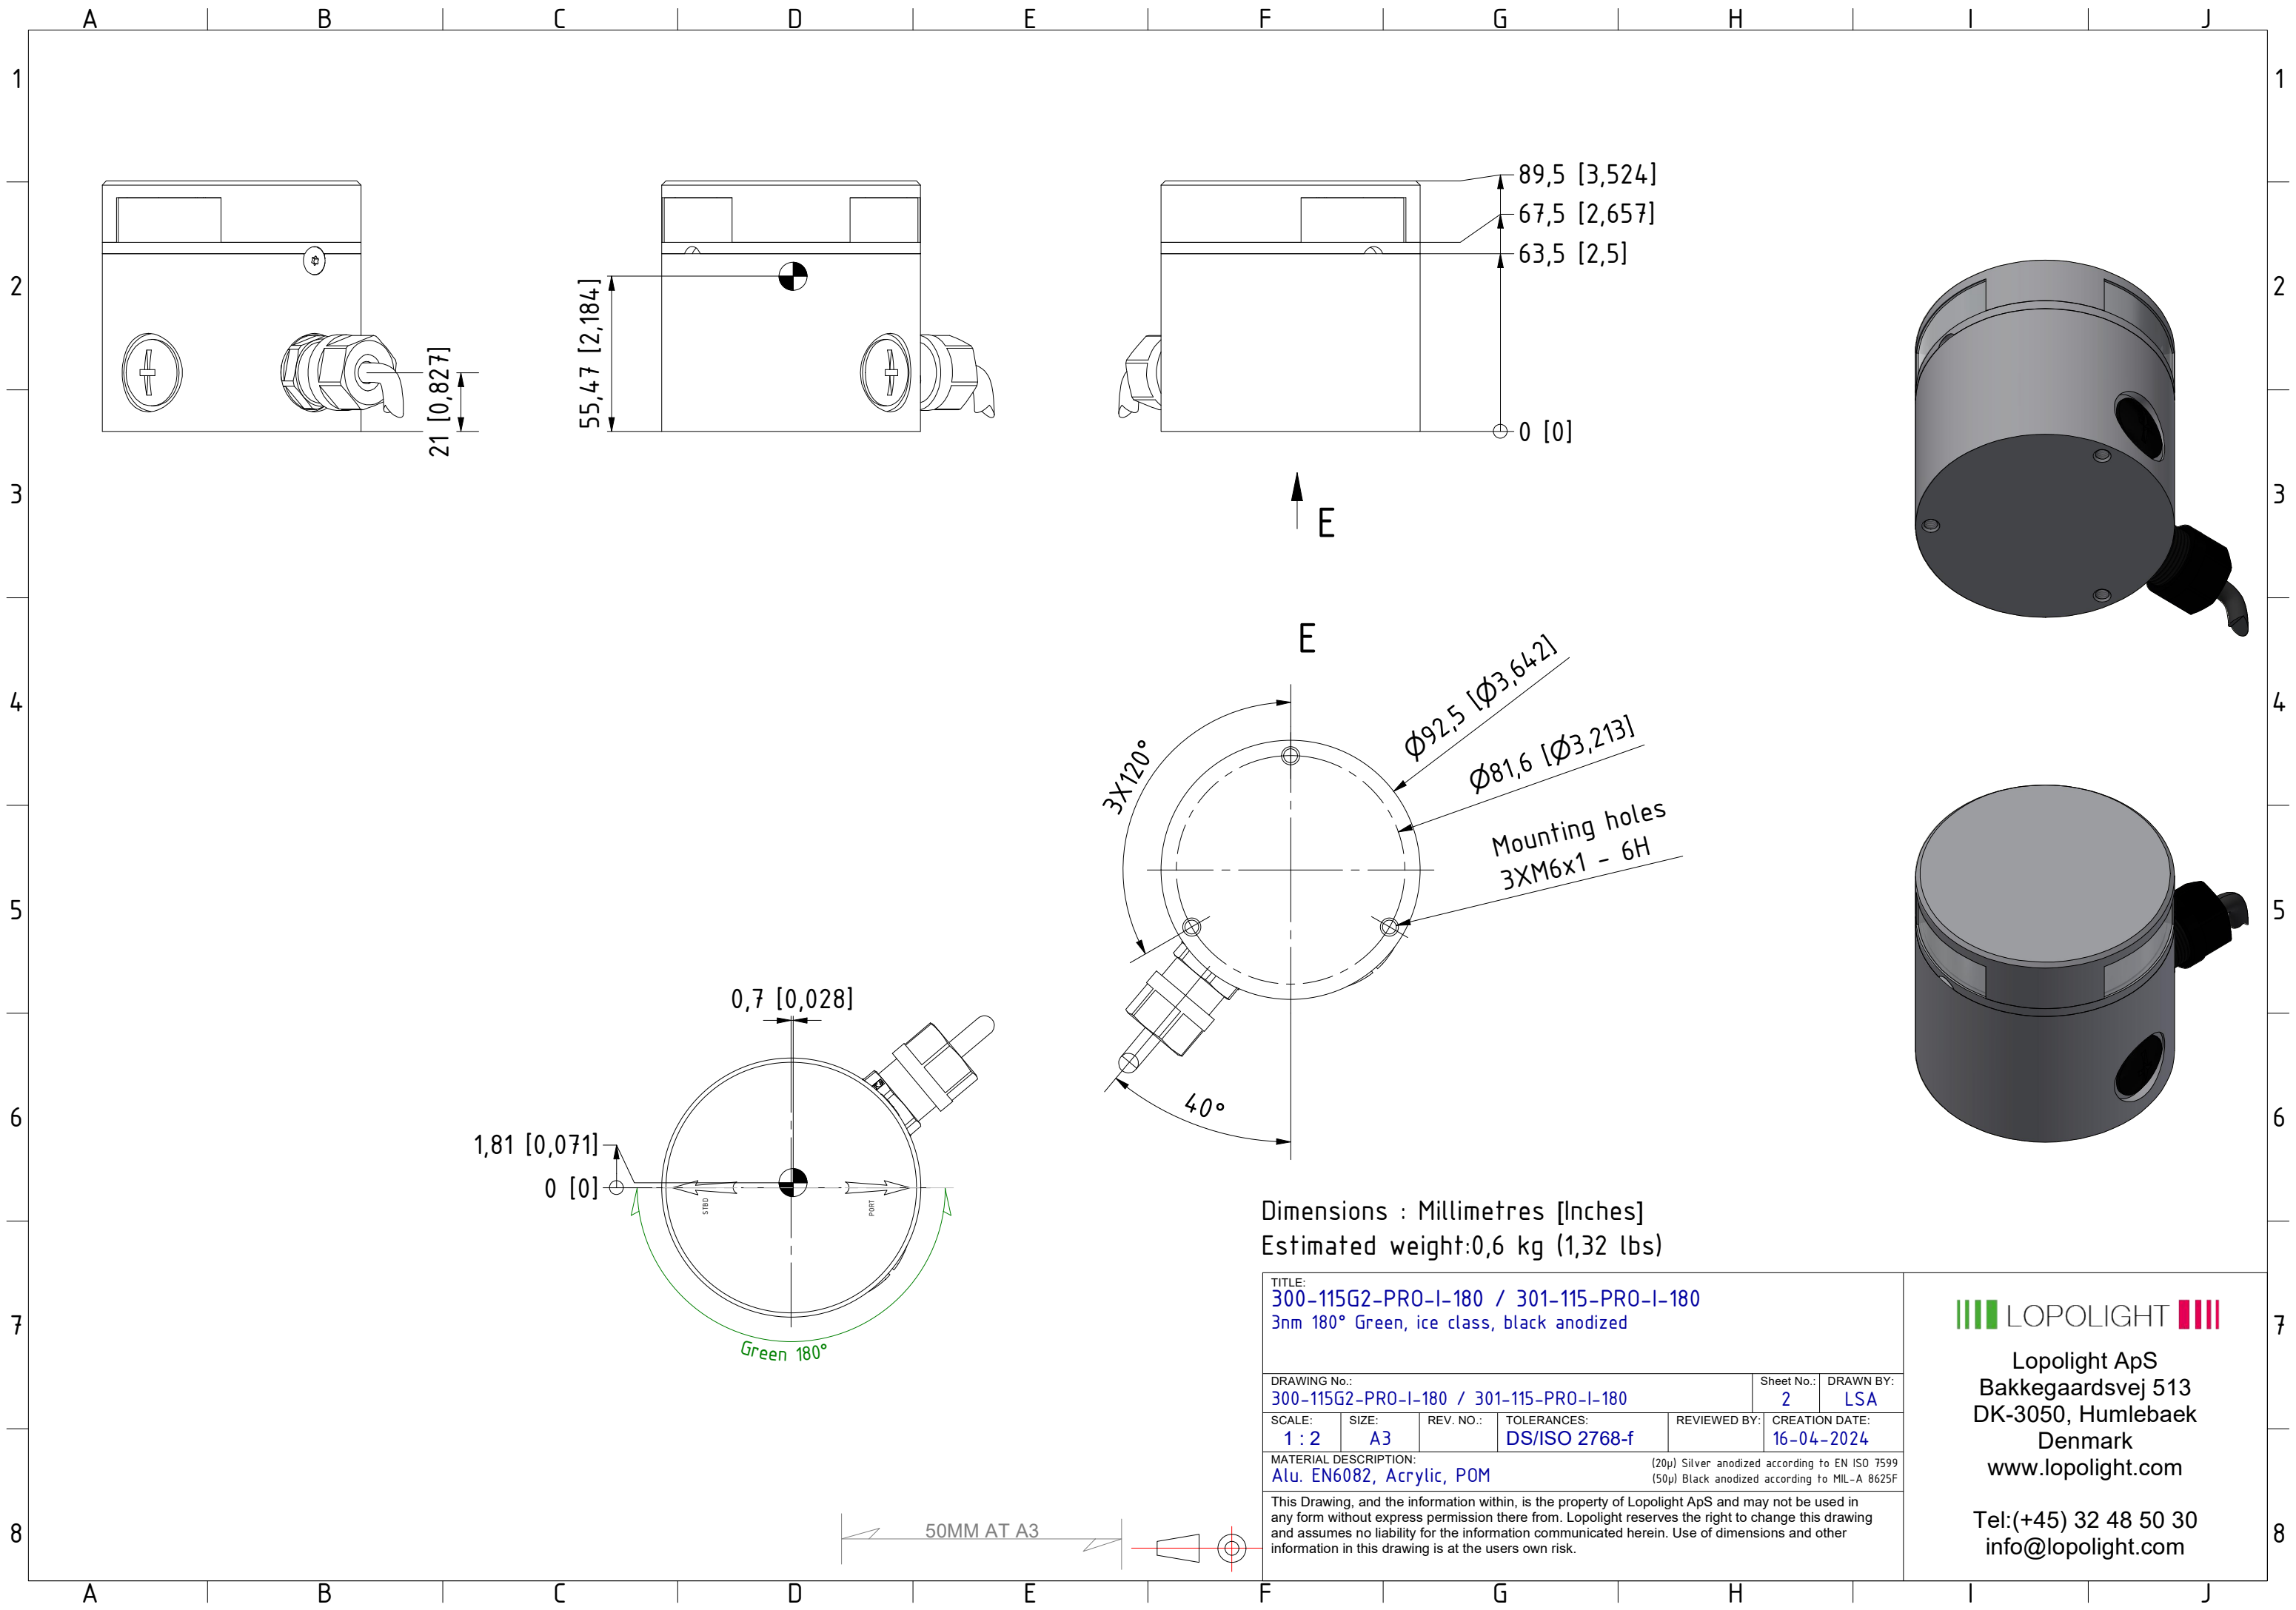

TITLE:
300-115G2-PRO-I-180 / 301-115-PRO-I-180
3nm 180° Green, ice class, black anodized

DRAWING No.: 300-115G2-PRO-I-180 / 301-115-PRO-I-180 Sheet No.: 2 DRAWN BY: LSA

SCALE: 1 : 2 SIZE: A3 REV. NO.: TOLERANCES: DS/ISO 2768-f REVIEWED BY: CREATION DATE: 16-04-2024

MATERIAL DESCRIPTION: (20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F

This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.

LOPOLIGHT

Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel: (+45) 32 48 50 30
info@lopolight.com