


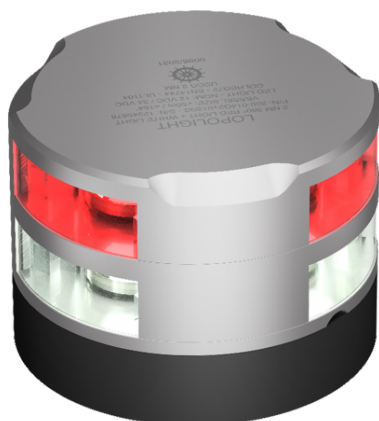

2nm 360° Red+2nm 360° White w/strobe, silver

200-014G2+012G2S

2nm 360° Red+2nm 360° White w/strobe, silver
Horizontally mounted with 0.75m cables

Specifications

Number	200-014G2+012G2S
Light Color	Red,White
Dimensions metric	Ø92,5mm x 68mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on www.lopolight.com under Service & Support
Intensity	>5.4cd
Dimensions imperial	Ø3.6" x 2.7"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	2nm
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438019676
IP rating	IP68
UPC Code	879343019808
Connection	0.7m cable
Current consumption (mA @ 12VDC)	150
Current consumption (mA @ 24VDC)	85

Specifications

Vessel size	Under 12M,12-20M,20-50M
--------------------	-------------------------

Weight (Kg)	0.82 Kg
--------------------	---------

Weight (Oz)	28.92 Oz
--------------------	----------