


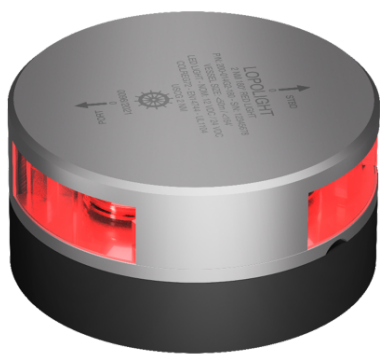

2nm 180° Red, silver anodized

200-014G2-180°

2nm 180° Red, silver anodized

Horizontally mounted with 0.75m cable

Specifications

Number 200-014G2-180°

Light Color Red

Dimensions metric Ø92,5mm x 46mm

Certification This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on www.lopolight.com under [Support](#)

Intensity >5.4cd

Dimensions imperial Ø3.6" x 1.8"

Approved to COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR

Visibility 2nm

Included In Package 1 Navigation light,precabled with 0.75 meter shielded marine grade cable,Installation guide

Operating temperature -25°C to 55°C

Mounting Horizontal

Materials Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane

Operating Voltage 10-32VDC

EAN 5704438019249

IP rating IP68

Power draw (W) 1,5

UPC Code 879343019372

Connection 0.7m cable

Specifications

**Current consumption
(mA @ 12VDC)** 145

Stock status Made to order

**Current consumption
(mA @ 24VDC)** 60

Vessel size Under 12M,12-20M,20-50M

Min. feed wire gauge 0.5mm2 AWG22

Weight (Kg) 0.56 Kg

Weight (Oz) 19.75 Oz