


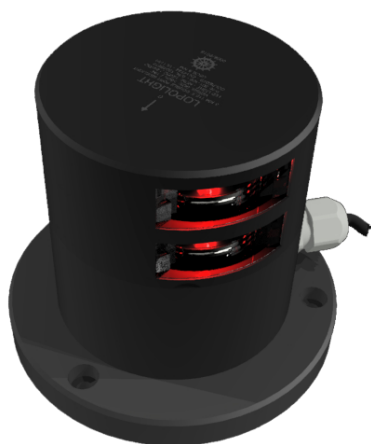

3nm port, double, black anodized

301-109ST-PRO

3nm port, double, black anodized
Horizontally mounted on 400-037-B alu base (IP68)
Cable direction side
incl. HDPE base plate
Quality cable glands - 3 sizes included:
9-17mm (3/8"-11/16") cable diameter
7-13mm (1/4"-1/2") cable diameter
4.5-10mm (5/32")

Specifications	
Number	301-109ST-PRO
Light Color	Red
Dimensions metric	Ø92,5mm x 125,5mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on www.lopolight.com under Support
Intensity	>15cd
Dimensions imperial	Ø3.6" x 4.9"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	3nm
Included In Package	1 Navigation light,2 Mounting screws (M6 * 8 mm),Installation guide
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Black hard coat anodized aluminum 50µ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438014138
IP rating	IP68
Power draw (W)	2,2
UPC Code	879343014131
Connection	Plug connector

Specifications

**Current consumption
(mA @ 12VDC)** 153

Stock status Usually in stock

**Current consumption
(mA @ 24VDC)** 92

Vessel size Over 50M

Min. feed wire gauge 0.5mm2 AWG22

Weight (Kg) 1.63 Kg

Weight (Oz) 57.49 Oz